



## First choice for durability.

### The environmentally friendly LUMILUX® lamp.

LUMILUX® fluorescent lamps from OSRAM are increasingly kind to the environment. The T8 LUMILUX® lamps now contain only 3 mg of mercury, and the LUMILUX® T5 HE and HO lamps only 2.5 mg – so they fall far below the RoHS threshold of 5 mg. In systems with ECGs from OSRAM these lamps make an ideal contribution to environment protection – not only because of the very small quantities of hazardous substances but also because of their very high efficiency and long reliable life (with consequently lower consumption of resources). They are also perfect for combining with daylight dimmer systems and presence detectors. This leads to even greater energy savings.

### How a fluorescent lamp works.

Fluorescent lamps are low-pressure gas discharge lamps. The glass tube is filled with an inert gas at low pressure and a small quantity of mercury. The glass wall is coated with a phosphor. At the ends of the glass tube are pasted electrodes. When an electrical charge is passed between them the mercury vapor emits UV radiation. When the UV radiation hits the phosphor the phosphor emits visible light. The color can be varied for different applications by selecting different phosphor mixes.

### The long-life LUMILUX® T8 XT and XXT systems.

The new LUMILUX® XT and XXT product families from OSRAM are the ideal solutions for all applications in which relamping is a difficult, time-consuming and therefore costly operation. The service life of the XT lamps on a preheat start ECG is 42,000 hours (switching cycle 11/1), and the XXT lamps can remain in use for as long as 75,000 hours until they reach the recommended relamping time. Because of the low loss of light of LUMILUX® T8 fluorescent lamps the service life of these lamps is defined as the time when 10% of the lamps have failed. OSRAM recommends replacing all the lamps at once at this time in order to save costs. Resources are also saved because a LUMILUX® XXT lasts so long that it replaces 4.1 LUMILUX® lamps.

### The economical LUMILUX® T5 HE system.

HE stands for High Efficiency. With a tube diameter of only 16 mm, these lamps offer an extremely high luminous efficacy of up to 104 lm/W (at 35 °C). They are designed for ECG operation and are up to 20% more efficient than LUMILUX® T8 lamps. They also enable extremely slim and compact luminaires to be created because their volume is up to 50% less and their length 5 cm shorter than comparable T8 lamps.


### The particularly bright LUMILUX® T5 HO system.

HO stands for High Output. This lamp system is particularly noted for its very high luminous flux, opening up new areas of application for the fluorescent lamp such as lighting for high-ceiling rooms. The T5 HO 80 W/840 for example has a luminous flux of up to 7000 lm (at 35 °C). HO lamps are designed for ECG operation and, like all LUMILUX® lamps from OSRAM, are ideal in systems with motion sensors and/or daylight dimmers to reduce energy consumption to a minimum.

### The universal T5 HO CONSTANT system.

HO CONSTANT is the first fluorescent lamp that has been optimized for a wider than usual temperature range. It is particularly suitable for cold applications (for example outdoors) and for hot luminaires (narrow recessed luminaires) because it provides more than 90% of its maximum luminous flux in an ambient temperature range of + 5 °C to + 70 °C, thereby extending the previous temperature range by 20 °C. Efficient energy-saving lighting is now possible in new areas of application.

## LUMILUX® T5 HE HIGH EFFICIENCY, tubular, G5 base

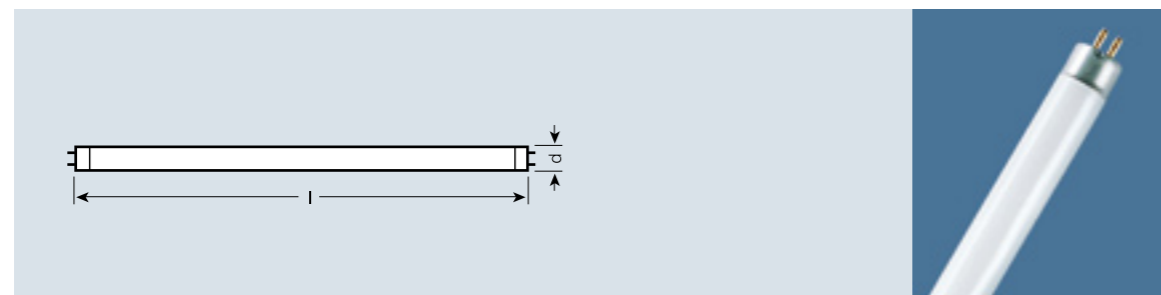

Product reference	Product number	W	lm <sup>1)2)</sup>		Ra	TUBE d [mm]	l [mm]		
<b>LUMILUX® T5 HE HIGH EFFICIENCY, tubular, G5 base</b>									
FH 14 W/827 HE	4050300645933	14	1200	LUMILUX INTERNA	80...89	16	549	40	
FH 14 W/830 HE	4050300464824	14	1200	LUMILUX Warm White	80...89	16	549	40	
FH 14 W/835 HE	4050300776514	14	1200	LUMILUX White	80...89	16	549	40	
FH 14 W/840 HE	4050300464688	14	1200	LUMILUX Cool White	80...89	16	549	40	
FH 14 W/865 HE	4050300464848	14	1100	LUMILUX Cool Daylight	80...89	16	549	40	
FH 14 W/880 HE	4008321225009	14	1050	LUMILUX SKYWHITE	80...89	16	549	20	
FH 21 W/827 HE	4050300645971	21	1900	LUMILUX INTERNA	80...89	16	849	40	
FH 21 W/830 HE	4050300464800	21	1900	LUMILUX Warm White	80...89	16	849	40	
FH 21 W/835 HE	4050300776538	21	1900	LUMILUX White	80...89	16	849	40	
FH 21 W/840 HE	4050300464701	21	1900	LUMILUX Cool White	80...89	16	849	40	
FH 21 W/865 HE	4050300464626	21	1750	LUMILUX Cool Daylight	80...89	16	849	40	
FH 21 W/880 HE	4008321224989	21	1700	LUMILUX SKYWHITE	80...89	16	849	20	
FH 28 W/827 HE	4050300646015	28	2600	LUMILUX INTERNA	80...89	16	1149	40	
FH 28 W/830 HE	4050300464787	28	2600	LUMILUX Warm White	80...89	16	1149	40	
FH 28 W/835 HE	4050300776552	28	2600	LUMILUX White	80...89	16	1149	40	
FH 28 W/840 HE	4050300464725	28	2600	LUMILUX Cool White	80...89	16	1149	40	
FH 28 W/865 HE	4050300464640	28	2400	LUMILUX Cool Daylight	80...89	16	1149	40	
FH 28 W/880 HE	4008321153517	28	2350	LUMILUX SKYWHITE	80...89	16	1149	20	
FH 35 W/827 HE	4050300646053	35	3300	LUMILUX INTERNA	80...89	16	1449	40	
FH 35 W/830 HE	4050300464763	35	3300	LUMILUX Warm White	80...89	16	1449	40	
FH 35 W/835 HE	4050300776576	35	3300	LUMILUX White	80...89	16	1449	40	
FH 35 W/840 HE	4050300464749	35	3300	LUMILUX Cool White	80...89	16	1449	40	
FH 35 W/865 HE	4050300464664	35	3050	LUMILUX Cool Daylight	80...89	16	1449	40	
FH 35 W/880 HE	4008321153531	35	3000	LUMILUX SKYWHITE	80...89	16	1449	20	

The lamps are designed for internal luminaire temperatures of 30 to 40 °C; the optimum luminous flux is achieved at 35 °C (see technical data pages 4.36 to 4.45).

Suitable for ECG operation only.


T5 HE LUMILUX® lamps (16 mm) offer excellent properties such as good luminous flux behavior, impressive economy and improved environmental friendliness. With Preheat Start ECGs, T5 HE lamps achieve an average life of 20,000 hours and a service life of 16,000 hours.

For more information on the system guarantee and the terms and conditions of the guarantee go to [www.osram.com/system-guarantee](http://www.osram.com/system-guarantee).

1) These values are reached at 25 °C (acc. to IEC 60081 lumen values for fluorescent lamps must always be specified for 25 °C). These lamps offer even more luminous flux if they are operated within the luminaire at their optimum ambient temperature (see pages 4.36 to 4.45).

2) For data for reference measurements and lighting planning see pages 4.36 ff.  
3) Can also be supplied in boxes of 20 with sleeves. Industrial boxes of 40 available for all lamps except LUMILUX SKYWHITE

## LUMILUX® T5 HO HIGH OUTPUT, tubular, G5 base

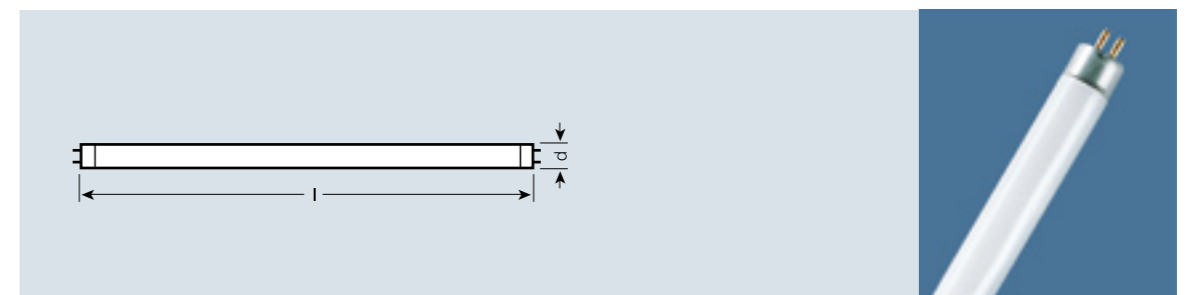

Product reference	Product number	W	lm <sup>1)2)</sup>		Ra	TUBE d [mm]	l [mm]		
<b>LUMILUX® T5 HO HIGH OUTPUT, tubular, G5 base</b>									
FQ 24 W/827 HO	4050300646091	24	1750	LUMILUX INTERNA	80...89	16	549	40	
FQ 24 W/830 HO	4050300453491	24	1750	LUMILUX Warm White	80...89	16	549	40	
FQ 24 W/835 HO	4050300776590	24	1750	LUMILUX White	80...89	16	549	40	
FQ 24 W/840 HO	4050300453477	24	1750	LUMILUX Cool White	80...89	16	549	40	
FQ 24 W/865 HO	4050300453453	24	1600	LUMILUX Cool Daylight	80...89	16	549	40	
FQ 24 W/880 HO	4008321081469	24	1550	LUMILUX SKYWHITE	80...89	16	549	20	
FQ 39 W/827 HO	4050300646138	39	3100	LUMILUX INTERNA	80...89	16	849	40	
FQ 39 W/830 HO	4050300453552	39	3100	LUMILUX Warm White	80...89	16	849	40	
FQ 39 W/835 HO	4050300776453	39	3100	LUMILUX White	80...89	16	849	20	
FQ 39 W/840 HO	4050300453538	39	3100	LUMILUX Cool White	80...89	16	849	40	
FQ 39 W/865 HO	4050300453514	39	2850	LUMILUX Cool Daylight	80...89	16	849	40	
FQ 39 W/880 HO	4008321081445	39	2750	LUMILUX SKYWHITE	80...89	16	849	20	
FQ 49 W/827 HO	4050300657172	49	4300	LUMILUX INTERNA	80...89	16	1449	40	
FQ 49 W/830 HO	4050300657158	49	4300	LUMILUX Warm White	80...89	16	1449	40	
FQ 49 W/835 HO	4008321110756	49	4300	LUMILUX White	80...89	16	1449	40	
FQ 49 W/840 HO	4050300657134	49	4300	LUMILUX Cool White	80...89	16	1449	40	
FQ 49 W/865 HO	4050300796628	49	4100	LUMILUX Cool Daylight	80...89	16	1449	40	
FQ 49 W/880 HO	4008321907486	49	4050	LUMILUX SKYWHITE	80...89	16	1449	20	

The lamps are designed for internal luminaire temperatures of 30 to 40 °C; the optimum luminous flux is achieved at 35 °C (see technical data pages 4.36 to 4.45). Suitable for ECG operation only.


As in the case of T5 HE lamps, T5 HO fluorescent lamps produce their maximum luminous flux at 35 °C, compared with 25 °C for T8 fluorescent lamps with a tube diameter of 26 mm. Since the temperatures in the luminaire are higher than the ambient temperature of, say, 20 to 25 °C, the efficiency is at least 5% higher than for T8 fluorescent lamps. The small tube diameter of 16 mm also leads to an increase in the efficiency of the luminaire. With Preheat Start ECGs, T5 HO lamps achieve an average life of 24,000 hours and a service life of 18,000 hours.

For more information on the system guarantee and the terms and conditions of the guarantee go to [www.osram.com/system-guarantee](http://www.osram.com/system-guarantee).

1) These values are reached at 25 °C (acc. to IEC 60081 lumen values for fluorescent lamps must always be specified for 25 °C). These lamps offer even more luminous flux if they are operated within the luminaire at their optimum ambient temperature (see pages 4.36 to 4.45).

2) For data for reference measurements and lighting planning see pages 4.36 ff.  
3) Can also be supplied in boxes of 20 with sleeves. Industrial boxes of 40 available for all lamps except LUMILUX SKYWHITE and FQ 39 W/835 HO

## LUMILUX® T5 HO HIGH OUTPUT, tubular, G5 base

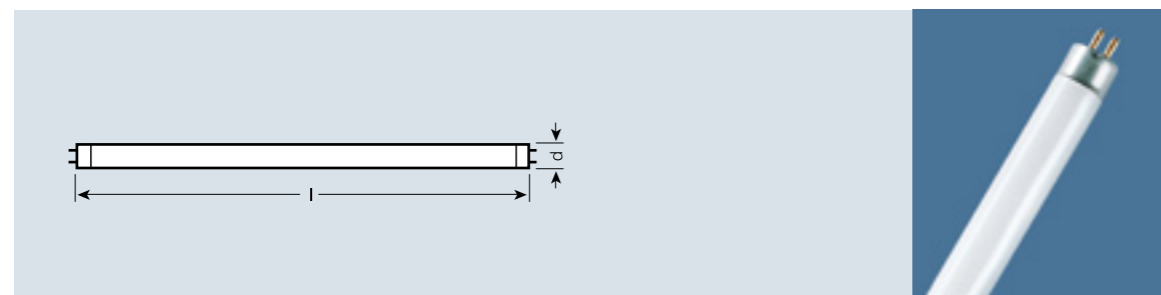


Product reference	Product number	W	lm <sup>1)2)</sup>		Ra			
<b>LUMILUX® T5 HO HIGH OUTPUT, tubular, G5 base</b>								
FQ 54 W/827 HO	4050300646176	54	4450	LUMILUX INTERNA	80...89	16	1149	40
FQ 54 W/830 HO	4050300453415	54	4450	LUMILUX Warm White	80...89	16	1149	40
FQ 54 W/835 HO	4050300776637	54	4450	LUMILUX White	80...89	16	1149	40
FQ 54 W/840 HO	4050300453392	54	4450	LUMILUX Cool White	80...89	16	1149	40
FQ 54 W/865 HO	4050300453378	54	4100	LUMILUX Cool Daylight	80...89	16	1149	40
FQ 54 W/880 HO	4008321070425	54	4000	LUMILUX SKYWHITE	80...89	16	1149	20
FQ 80 W/827 HO	4050300646213	80	6150	LUMILUX INTERNA	80...89	16	1449	40
FQ 80 W/830 HO	4050300515137	80	6150	LUMILUX Warm White	80...89	16	1449	40
FQ 80 W/835 HO	4050300776651	80	6150	LUMILUX White	80...89	16	1449	40
FQ 80 W/840 HO	4050300515151	80	6150	LUMILUX Cool White	80...89	16	1449	40
FQ 80 W/865 HO	4050300515113	80	5700	LUMILUX Cool Daylight	80...89	16	1449	40
FQ 80 W/880 HO	4008321070449	80	5550	LUMILUX SKYWHITE	80...89	16	1449	20

The lamps are designed for internal luminaire temperatures of 30 to 40 °C; the optimum luminous flux is achieved at 35 °C (see technical data pages 4.36 to 4.45). Suitable for ECG operation only.

As in the case of T5 HE lamps, T5 HO fluorescent lamps produce their maximum luminous flux at 35 °C, compared with 25 °C for T8 fluorescent lamps with a tube diameter of 26 mm. Since the temperatures in the luminaire are higher than the ambient temperature of, say, 20 to 25 °C, the efficiency is at least 5% higher than for T8 fluorescent lamps. The small tube diameter of 16 mm also leads to an increase in the efficiency of the luminaire. With Preheat Start ECGs, T5 HO lamps achieve an average life of 24,000 hours and a service life of 18,000 hours.

For more information on the system guarantee and the terms and conditions of the guarantee go to [www.osram.com/system-guarantee](http://www.osram.com/system-guarantee).

## LUMILUX® T5 HO CONSTANT, tubular, G5 base

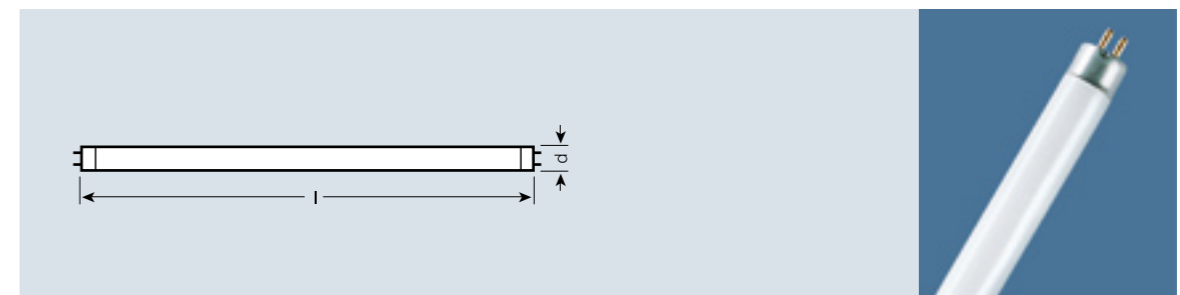

Product reference	Product number	W	lm <sup>1)2)</sup>		Ra			
<b>LUMILUX® T5 HO CONSTANT, tubular, G5 base</b>								
FQ 24 W/830 HO CONSTANT	4008321074911	24	1950	LUMILUX Warm White	80...89	16	549	20
FQ 24 W/840 HO CONSTANT	4008321075451	24	1950	LUMILUX Cool White	80...89	16	549	20
FQ 24 W/865 HO CONSTANT	4008321075475	24	1850	LUMILUX Cool Daylight	80...89	16	549	20
FQ 39 W/830 HO CONSTANT	4008321075512	39	3400	LUMILUX Warm White	80...89	16	849	20
FQ 39 W/840 HO CONSTANT	4008321075550	39	3400	LUMILUX Cool White	80...89	16	849	20
FQ 39 W/865 HO CONSTANT	4008321075574	39	3200	LUMILUX Cool Daylight	80...89	16	849	20
FQ 54 W/830 HO CONSTANT	4008321075611	54	4850	LUMILUX Warm White	80...89	16	1149	20
FQ 54 W/840 HO CONSTANT	4008321075659	54	4850	LUMILUX Cool White	80...89	16	1149	20
FQ 54 W/865 HO CONSTANT	4008321075673	54	4600	LUMILUX Cool Daylight	80...89	16	1149	20
FQ 80 W/830 HO CONSTANT	4008321075819	80	6800	LUMILUX Warm White	80...89	16	1449	20
FQ 80 W/840 HO CONSTANT	4008321080042	80	6800	LUMILUX Cool White	80...89	16	1449	20
FQ 80 W/865 HO CONSTANT	4008321080066	80	6450	LUMILUX Cool Daylight	80...89	16	1449	20

The lamps are optimized for internal luminaire temperatures of 5 °C to 70 °C; over this entire temperature range they achieve more than 90% of their optimum luminous flux, and more than 95% in the 15 °C to 60 °C range. Suitable for ECG operation only.


T5 HO CONSTANT uses new high-temperature amalgam technology. This enables the lamps to operate with a luminous flux greater than 90% in a temperature range from +5 °C to +70 °C. This compares favorably with conventional T5 lamps (> 90% between 25 °C and 50 °C). This means that for the first time T5 technology can be used for outdoor lighting applications and in compact luminaires where temperatures can get really high. With the new optimized QT<sub>i</sub> DIM units from OSRAM the T5 HO CONSTANT lamps are approved for dimming down to 1%. For information on our dimmers see Section 9; for the latest on dimming of HO CONSTANT lamps go to [www.osram.com/hoconstant](http://www.osram.com/hoconstant).

For more information on the system guarantee and the terms and conditions of the guarantee go to [www.osram.com/system-guarantee](http://www.osram.com/system-guarantee).

1) These values are reached at 25 °C (acc. to IEC 60081 lumen values for fluorescent lamps must always be specified for 25 °C). These lamps offer even more luminous flux if they are operated within the luminaire at their optimum ambient temperature (see pages 4.36 to 4.45).

2) For data for reference measurements and lighting planning see pages 4.36 ff.  
3) Can also be supplied in boxes of 20 with sleeves. Industrial boxes of 40 available for all lamps except LUMILUX SKYWHITE and FQ 39 W/835 HO


## LUMILUX® T5 DE LUXE HO HIGH OUTPUT, tubular, G5 base

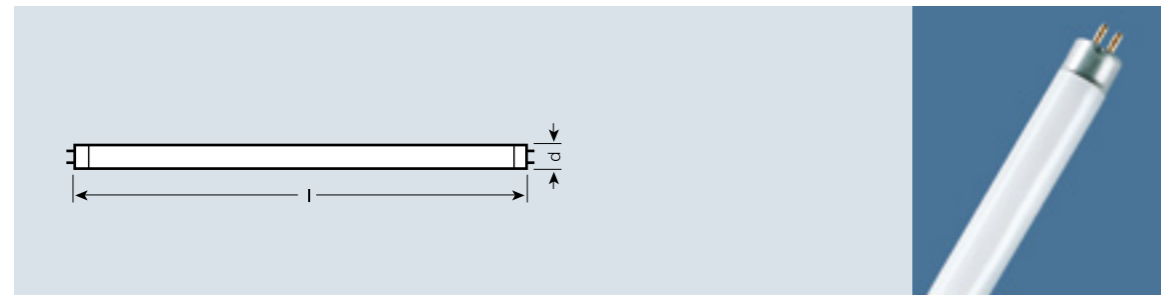

Product reference	Product number	W	Im <sup>1)2)</sup>		Ra	TUBE d (mm)	l (mm)	
<b>LUMILUX® T5 DE LUXE HO HIGH OUTPUT, tubular, G5 base</b>								
FQ 24 W/940 HO	4008321233028	24	1400	LUMILUX DE LUXE Cool White	> 90	16	549	10
FQ 24 W/965 HO	4008321233042	24	1400	LUMILUX DE LUXE Cool Daylight	> 90	16	549	10
FQ 49 W/940 HO	4008321234025	49	3700	LUMILUX DE LUXE Cool White	> 90	16	1449	10
FQ 49 W/965 HO	4008321233066	49	3700	LUMILUX DE LUXE Cool Daylight	> 90	16	1449	10
FQ 54 W/940 HO	4008321233929	54	3800	LUMILUX DE LUXE Cool White	> 90	16	1149	10
FQ 54 W/965 HO	4008321233943	54	3800	LUMILUX DE LUXE Cool Daylight	> 90	16	1149	10
FQ 80 W/940 HO	4008321233967	80	5500	LUMILUX DE LUXE Cool White	> 90	16	1449	10
FQ 80 W/965 HO	4008321233981	80	5500	LUMILUX DE LUXE Cool Daylight	> 90	16	1449	10
Suitable for ECG operation only.								

The combination of a small tube diameter of 16 mm and excellent color rendering of  $R_a > 90$  makes this lamp ideal solution for attractive lighting tasks, for example general lighting applications in museums, public buildings and shops.

## T5 short, tubular, G5 base

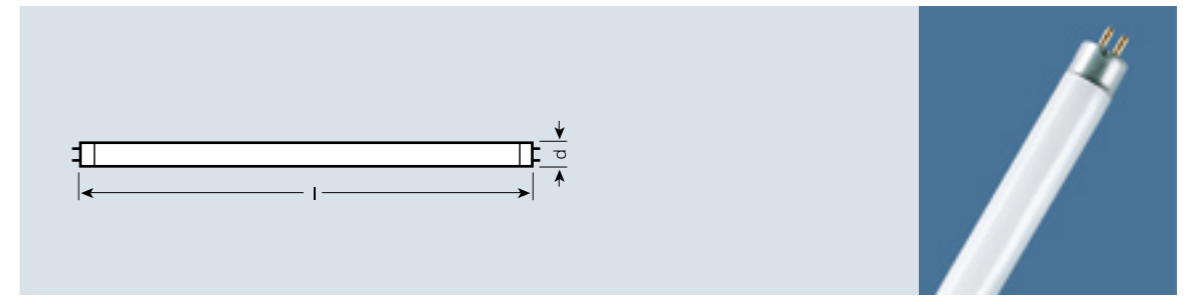


Product reference	Product number	W	Im <sub>CCG</sub>		Ra	TUBE d (mm)	l (mm)	
<b>LUMILUX® DE LUXE T5 short, tubular, G5 base</b>								
L 6 W/930	4050300015880	6	210	LUMILUX DE LUXE Warm White	> 90	16	212	25
L 8 W/930	4050300015897	8	295	LUMILUX DE LUXE Warm White	> 90	16	288	25
L 8 W/954	4050300018232	8	300	LUMILUX DE LUXE Daylight	> 90	16	288	25
L 13 W/930	4050300015903	13	650	LUMILUX DE LUXE Warm White	> 90	16	517	25
L 13 W/954	40503000327419	13	680	LUMILUX DE LUXE Daylight	> 90	16	517	25
<b>LUMILUX® T5 short, tubular, G5 base</b>								
L 8 W/827	4050300008943	8	450	LUMILUX INTERNA	80...89	16	288	25
L 8 W/840	40503000241623	8	430	LUMILUX Cool White	80...89	16	288	25
L 13 W/827	4050300008967	13	1000	LUMILUX INTERNA	80...89	16	517	25
L 13 W/840	40503000241647	13	970	LUMILUX Cool White	80...89	16	517	25
<b>ENERGY SAVER (Basic) T5 short, tubular, G5 base</b>								
L 4 W/640	4050300008875	4	140	Cool White	60...69	16	136	25
L 6 W/640	4050300008899	6	270	Cool White	60...69	16	212	25
L 8 W/640	4050300008912	8	385	Cool White	60...69	16	288	25
L 8 W/765	4050300035475	8	330	Cool Daylight	70...79	16	288	25
L 13 W/640	4050300008974	13	830	Cool White	60...69	16	517	25
<b>Emergency Lighting (Basic) T5 short, tubular, G5 base</b>								
L 6 W/640 EL	4008321152381	6	270	Cool White	60...69	16	212	25
L 8 W/640 EL	4050300060644	8	385	Cool White	60...69	16	288	25
For circuit see page 4.32, Fig. 9 For electronic control gear see Section 9. For further technical data see pages 4.36 to 4.45								

1) These values are reached at 25 °C (acc. to IEC 60081 lumen values for fluorescent lamps must always be specified for 25 °C). These lamps offer even more luminous flux if they are operated within the luminaire at their optimum ambient temperature (see pages 4.36 to 4.45).

2) For data for reference measurements and lighting planning see pages 4.36 ff.


**Colored T5 HE HIGH EFFICIENCY, tubular, G5 base**  
**Colored T5 HO HIGH OUTPUT, tubular, G5 base**

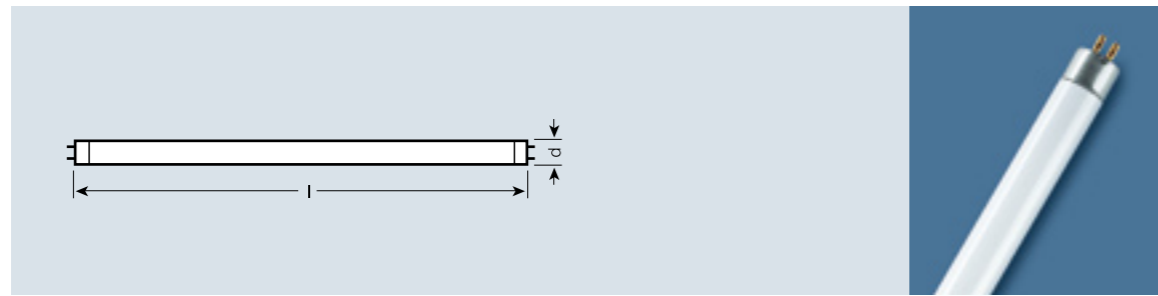

Product reference	Product number	W	lm				
<b>Colored T5 HE HIGH EFFICIENCY, tubular, G5 base</b>							
FH 14 W/60 HE	4008321170705	14	930	Red	16	549	10
FH 14 W/66 HE	4008321170729	14	1550	Green	16	549	10
FH 14 W/67 HE	4008321170781	14	300	Blue	16	549	10
FH 21 W/60 HE	4008321170682	21	1500	Red	16	849	10
FH 21 W/66 HE	4008321170743	21	2500	Green	16	849	10
FH 21 W/67 HE	4008321170804	21	500	Blue	16	849	10
FH 28 W/60 HE	4008321161840	28	2100	Red	16	1149	10
FH 28 W/66 HE	4008321161864	28	3500	Green	16	1149	10
FH 28 W/67 HE	4008321161888	28	700	Blue	16	1149	10
FH 35 W/60 HE	4008321133458	35	2650	Red	16	1449	10
FH 35 W/66 HE	4008321161925	35	4450	Green	16	1449	10
FH 35 W/67 HE	4008321161949	35	875	Blue	16	1449	10
<b>Colored T5 HO HIGH OUTPUT, tubular, G5 base</b>							
FQ 24 W/60 HO	4008321171009	24	1500	Red	16	549	10
FQ 24 W/66 HO	4008321170941	24	2500	Green	16	549	10
FQ 24 W/67 HO	4008321170880	24	525	Blue	16	549	10
FQ 39 W/60 HO	4008321170989	39	2450	Red	16	849	10
FQ 39 W/66 HO	4008321170927	39	4100	Green	16	849	10
FQ 39 W/67 HO	4008321170866	39	850	Blue	16	849	10
FQ 54 W/60 HO	4008321170965	54	3450	Red	16	1149	10
FQ 54 W/66 HO	4008321170903	54	6300	Green	16	1149	10
FQ 54 W/67 HO	4008321170842	54	1200	Blue	16	1149	10
FQ 80 W/60 HO	4008321161963	80	4525	Red	16	1449	10
FQ 80 W/66 HO	4008321161987	80	7650	Green	16	1449	10
FQ 80 W/67 HO	4008321162007	80	1550	Blue	16	1449	10

For further technical data see pages 4.36 to 4.45  
 Suitable for ECG operation only.

**LUMILUX® SPLIT control T5, tubular, G5 base**

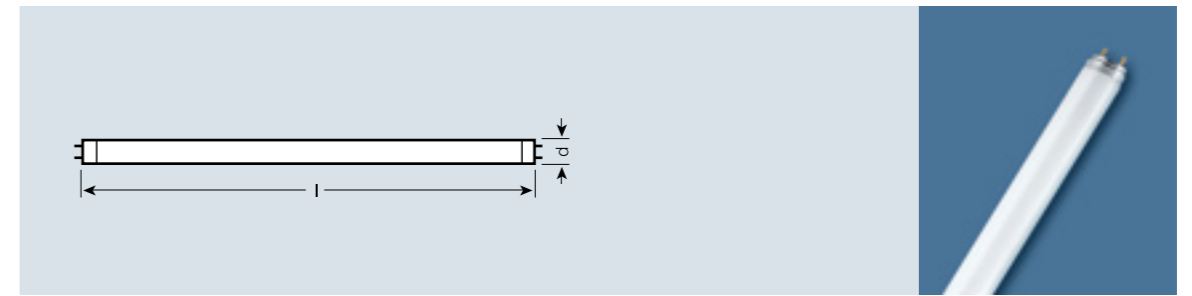

Product reference	Product number	W	lm				
<b>LUMILUX® SPLIT control T5, tubular, G5 base</b>							
FH 28 W/840 HE SPS	4008321233387	28	2250	Cool White	16	1149	10
FQ 54 W/840 HO SPS	4008321233363	54	4400	Cool White	16	1149	10

Suitable for ECG operation only.


**LUMILUX® SPLIT control:**

It is essential especially in the food industry and in sensitive food production areas that the accidental breakage of lamps does not lead to the widespread scattering of shattered glass. In the unlikely event of breakage, the SPLIT control design ensures that no shattered glass can be dispersed thanks to the plastic sleeve that is attached both to the glass and base. These lamps are highly recommended to companies operating and certified in accordance to the International Food Standard, particularly if open luminaries are in place.


Since 1998 in lieu of the Food Hygiene Directive, the Hazard Analysis and Critical Control Point (HACCP) concept has been implemented into German regulations.

We recommend replacing lamps with protective sleeves when they reach their average life.

For more information on the system guarantee and the terms and conditions of the guarantee go to [www.osram.com/system-guarantee](http://www.osram.com/system-guarantee).



## LUMILUX® CHIP control® T5, tubular, G5 base

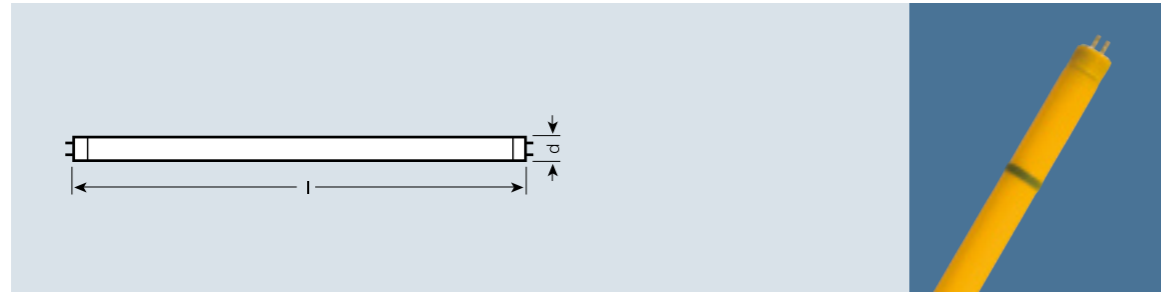

Product reference	Product number	W	lm				
<b>LUMILUX® CHIP control® T5, tubular, G5 base</b>							
FH 28 W/62 HE CHIP CONTR	4008321233424	28	2040	Yellow	16	1149	10
FQ 54 W/62 HO CHIP CONTR	4008321233400	54	3140	Yellow	16	1149	10

Suitable for ECG operation only.


NEW  
NEW

LUMILUX® CHIP control®: ideal for semiconductor fabrication plants and areas where UV radiation and light from the blue end of the spectrum must be reduced to the absolute minimum. For example, in print shops during the exposure of printing plates and also for lighting systems in which splinter protection and good color effects are required. A new and special type of plastic sleeve designed specifically for this application enables the lamp to be used also in enclosed luminaires offering constant protection throughout the lifetime of the lamp. Also available in T8 technology.

For more information on the system guarantee and the terms and conditions of the guarantee go to [www.osram.com/system-guarantee](http://www.osram.com/system-guarantee).



## LUMILUX® T5 FC® FLUORESCENT CIRCLINE, 2Gx13 base

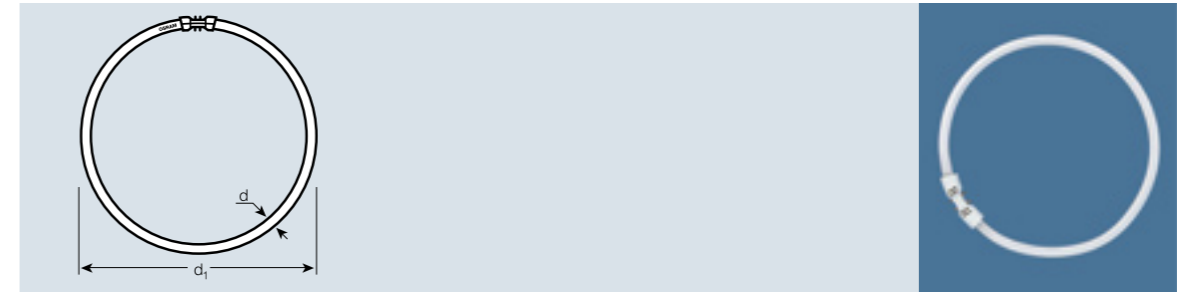

Product reference	Product number	W	lm		Ra			
<b>LUMILUX® T5 FC® FLUORESCENT CIRCLINE, 2Gx13 base</b>								
FC 22 W/827	4050300646237	22	1800	LUMILUX INTERNA	80...89	225	16	12
FC 22 W/830	4050300528489	22	1800	LUMILUX Warm White	80...89	225	16	12
FC 22 W/840	4050300528465	22	1800	LUMILUX Cool White	80...89	225	16	12
FC 22 W/865	4050300528441	22	1710	LUMILUX Cool Daylight	80...89	225	16	12
FC 40 W/827	4050300646251	40	3200	LUMILUX INTERNA	80...89	300	16	12
FC 40 W/830	4050300528540	40	3200	LUMILUX Warm White	80...89	300	16	12
FC 40 W/840	4050300528526	40	3200	LUMILUX Cool White	80...89	300	16	12
FC 40 W/865	4050300528502	40	3000	LUMILUX Cool Daylight	80...89	300	16	12
FC 55 W/827	4050300646275	55	4200	LUMILUX INTERNA	80...89	300	16	12
FC 55 W/830	4050300528601	55	4200	LUMILUX Warm White	80...89	300	16	12
FC 55 W/840	4050300528588	55	4200	LUMILUX Cool White	80...89	300	16	12
FC 55 W/865	4050300528564	55	3800	LUMILUX Cool Daylight	80...89	300	16	12

Suitable for ECG operation only.

**Designers and architects are looking for suitable alternatives to standard strip lighting. They appreciate round luminaires that will blend in perfectly with their surroundings. OSRAM has therefore taken its super bright LUMILUX® T5 HO lamps and developed the circular LUMILUX® T5 FC® fluorescent lamp ("Fluorescent Circline") in two diameters.**

### An all-round solution whichever way you look at it

The innovative solution for all lighting designers and architects who want to get away from the restrictions of strip lighting and rectangular grid systems. The circular LUMILUX® T5 FC® system paves the way for unconventional high-intensity circular lumi-


naires with so many different uses for the FC 22 W, 40 W and 55 W lamps. The circular shape of the LUMILUX® T5 FC® fluorescent lamp enables designers to create round luminaires that emit light in all directions.

### Slim lamp, low-profile luminaire

The tube diameter is just 16 mm so the luminaires can be unusually shallow and compact and offer high levels of efficiency. Many manufacturers have taken up the idea of circular lighting with the LUMILUX® T5 FC® system from OSRAM and launched a wide variety of innovative luminaires with unconventional designs and optimum efficiency on the market.



## LUMILUX® T8, tubular, G13 base

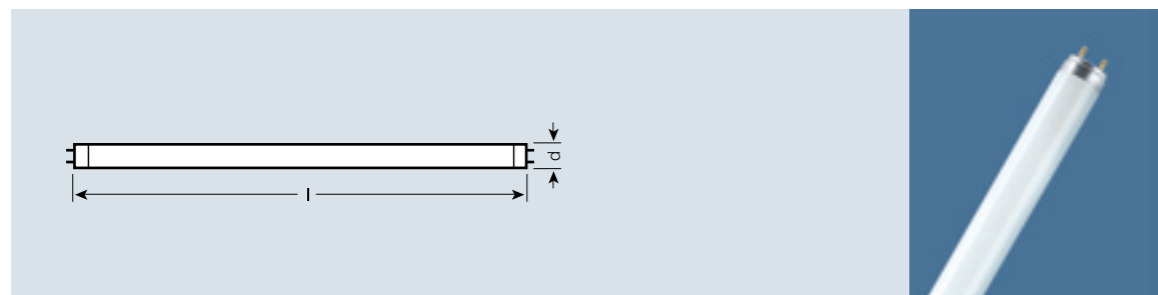


Product reference	Product number	W	lm		Ra			
<b>LUMILUX® T8, tubular, G13 base</b>								
L 10 W/827	4050300446165	10	650	LUMILUX INTERNA	80...89	26	470	25
L 15 W/827	4050300446042	15	950	LUMILUX INTERNA	80...89	26	438	25
L 15 W/830	4050300446028	15	950	LUMILUX Warm White	80...89	26	438	25
L 15 W/840	4050300446004	15	950	LUMILUX Cool White	80...89	26	438	25
L 15 W/865	4050300446189	15	900	LUMILUX Cool Daylight	80...89	26	438	25
L 16 W/827	4050300446080	16	1250	LUMILUX INTERNA	80...89	26	720	25
L 16 W/840	4050300446066	16	1250	LUMILUX Cool White	80...89	26	720	25
L 18 W/827 <sup>1)</sup>	4050300517834	18	1350	LUMILUX INTERNA	80...89	26	590	25
L 18 W/830	4050300517810	18	1350	LUMILUX Warm White	80...89	26	590	25
L 18 W/835	4050300447964	18	1350	LUMILUX White	80...89	26	590	25
L 18 W/840 <sup>1)</sup>	4050300517797	18	1350	LUMILUX Cool White	80...89	26	590	25
L 18 W/865	4050300517773	18	1300	LUMILUX Cool Daylight	80...89	26	590	25
L 18 W/880	4008321027962	18	1300	LUMILUX SKYWHITE	80...89	26	590	25
L 23 W/830	4050300446264	23	1900	LUMILUX Warm White	80...89	26	970	25
L 23 W/840	4050300446240	23	1900	LUMILUX Cool White	80...89	26	970	25
L 30 W/827	4050300518077	30	2400	LUMILUX INTERNA	80...89	26	895	25
L 30 W/830	4050300518053	30	2400	LUMILUX Warm White	80...89	26	895	25
L 30 W/840	4050300518039	30	2400	LUMILUX Cool White	80...89	26	895	25
L 30 W/865	4050300518015	30	2350	LUMILUX Cool Daylight	80...89	26	895	25
L 30 W/880	4008321027986	30	2350	LUMILUX SKYWHITE	80...89	26	895	25

For QUICKTRONIC® electronic control gear see Section 9.

Fluorescent lamps in LUMILUX® and BASIC light colors offer up to 10% energy savings compared with previous fluorescent lamps with a 38 mm tube diameter. They are designed to operate with conventional control gear and starters or with QUICKTRONIC® electronic control gear. If used in starter circuits, these lamps can operate with standard control gear and recommended compensation capacitors.

For more information on the system guarantee and the terms and conditions of the guarantee go to [www.osram.com/system-guarantee](http://www.osram.com/system-guarantee).

## LUMILUX® T8, tubular, G13 base

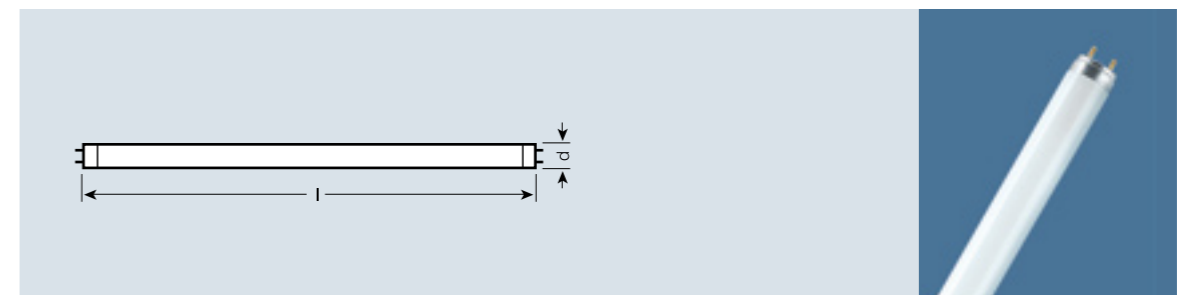


Product reference	Product number	W	lm		Ra			
L 36 W/827 <sup>1)</sup>	4050300517919	36	3350	LUMILUX INTERNA	80...89	26	1200	25
L 36 W/827-1	4050300518114	36	3100	LUMILUX INTERNA	80...89	26	970	25
L 36 W/830 <sup>1)</sup>	4050300517896	36	3350	LUMILUX Warm White	80...89	26	1200	25
L 36 W/835	4050300447988	36	3350	LUMILUX White	80...89	26	1200	25
L 36 W/840 <sup>1)</sup>	4050300517872	36	3350	LUMILUX Cool White	80...89	26	1200	25
L 36 W/840-1	4050300518091	36	3100	LUMILUX Cool White	80...89	26	970	25
L 36 W/865	4050300517858	36	3250	LUMILUX Cool Daylight	80...89	26	1200	25
L 36 W/880	4008321002976	36	2900	LUMILUX SKYWHITE	80...89	26	1200	25
L 38 W/830	4050300518152	38	3300	LUMILUX Warm White	80...89	26	1047	25
L 38 W/840	4050300518138	38	3300	LUMILUX Cool White	80...89	26	1047	25
L 38 W/880	4008321072245	38	2950	LUMILUX SKYWHITE	80...89	26	1047	25
L 58 W/827	4050300603049	58	5200	LUMILUX INTERNA	80...89	26	1500	25
L 58 W/830 <sup>1)</sup>	4050300517971	58	5200	LUMILUX Warm White	80...89	26	1500	25
L 58 W/835	4050300448008	58	5200	LUMILUX White	80...89	26	1500	25
L 58 W/840 <sup>1)</sup>	4050300517957	58	5200	LUMILUX Cool White	80...89	26	1500	25
L 58 W/865	4050300517933	58	5000	LUMILUX Cool Daylight	80...89	26	1500	25
L 58 W/880	4008321002990	58	4900	LUMILUX SKYWHITE	80...89	26	1500	25
L 70 W/835	4008321003911	70	6200	LUMILUX White	80...89	26	1800	25
L 70 W/840	4008321003959	70	6200	LUMILUX Cool White	80...89	26	1800	25

For QUICKTRONIC® electronic control gear see Section 9.

Fluorescent lamps in LUMILUX® and BASIC light colors offer up to 10% energy savings compared with previous fluorescent lamps with a 38 mm tube diameter. They are designed to operate with conventional control gear and starters or with QUICKTRONIC® electronic control gear. If used in starter circuits, these lamps can operate with standard control gear and recommended compensation capacitors.

For more information on the system guarantee and the terms and conditions of the guarantee go to [www.osram.com/system-guarantee](http://www.osram.com/system-guarantee).

## LUMILUX® XT T8, tubular, G13 base

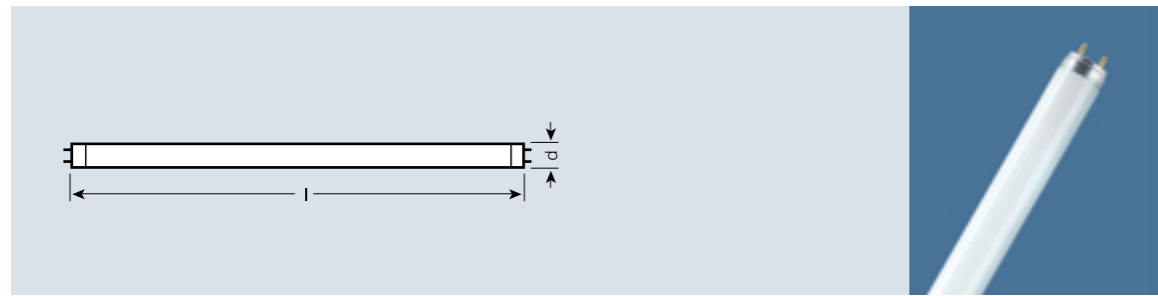

Product reference	Product number	W	lm		Ra			
<b>LUMILUX® XT T8, tubular, G13 base</b>								
L 18 W/830 XT	4008321 <b>209085</b>	18	1350	LUMILUX Warm White	80...89	26	590	25
L 18 W/840 XT	4008321 <b>209108</b>	18	1350	LUMILUX Cool White	80...89	26	590	25
L 18 W/865 XT	4008321 <b>209122</b>	18	1250	LUMILUX Cool Daylight	80...89	26	590	25
L 36 W/830 XT	4008321 <b>209146</b>	36	3300	LUMILUX Warm White	80...89	26	1200	25
L 36 W/840 XT	4008321 <b>209160</b>	36	3300	LUMILUX Cool White	80...89	26	1200	25
L 36 W/865 XT	4008321 <b>209221</b>	36	3250	LUMILUX Cool Daylight	80...89	26	1200	25
L 58 W/830 XT	4008321 <b>209344</b>	58	5200	LUMILUX Warm White	80...89	26	1500	25
L 58 W/840 XT	4008321 <b>209320</b>	58	5200	LUMILUX Cool White	80...89	26	1500	25
L 58 W/865 XT	4008321 <b>923622</b>	58	5000	LUMILUX Cool Daylight	80...89	26	1500	25

LUMILUX® T8 XT is ideal for lighting systems in which relamping is a costly operation, such as in factories with high ceilings, subway stations, tunnels and street lighting.


Thanks to a high level of reliability and long service life\* (up to 42,000 hours) these lamps extend the maintenance cycle.

Excellent results:

The service life\* of a LUMILUX® T8 XT is 2.3 times greater than that of a normal LUMILUX® lamp so costs are greatly reduced, and there is a benefit to the environment because the consumption of resources (glass, metal, etc.) is also reduced.

For more information on the system guarantee and the terms and conditions of the guarantee go to [www.osram.com/system-guarantee](http://www.osram.com/system-guarantee).

## LUMILUX® XXT T8, tubular, G13 base

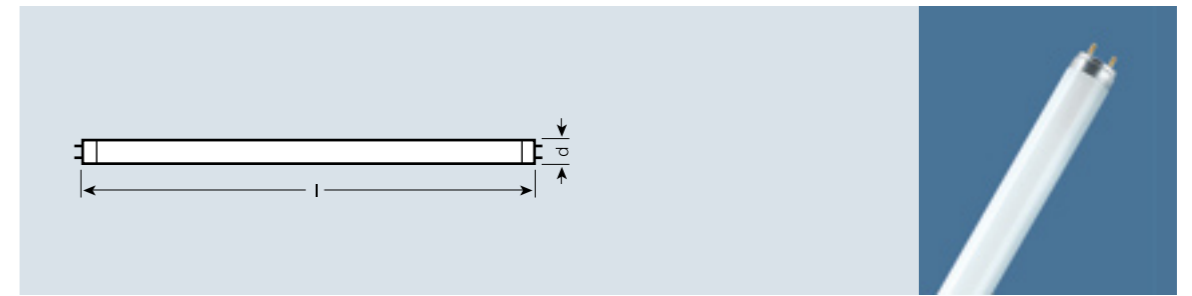


Product reference	Product number	W	lm		Ra			
<b>LUMILUX® XXT T8, tubular, G13 base</b>								
L 18 W/830 XXT	4008321 <b>923646</b>	18	1350	LUMILUX Warm White	80...89	26	590	25
L 18 W/840 XXT	4008321 <b>923660</b>	18	1350	LUMILUX Cool White	80...89	26	590	25
L 18 W/865 XXT	4008321 <b>923684</b>	18	1250	LUMILUX Cool Daylight	80...89	26	590	25
L 36 W/830 XXT	4008321 <b>923707</b>	36	3250	LUMILUX Warm White	80...89	26	1200	25
L 36 W/840 XXT	4008321 <b>923721</b>	36	3250	LUMILUX Cool White	80...89	26	1200	25
L 36 W/865 XXT	4008321 <b>923745</b>	36	3150	LUMILUX Cool Daylight	80...89	26	1200	25
L 58 W/830 XXT	4008321 <b>923769</b>	58	5150	LUMILUX Warm White	80...89	26	1500	25
L 58 W/840 XXT	4008321 <b>923783</b>	58	5150	LUMILUX Cool White	80...89	26	1500	25
L 58 W/865 XXT	4008321 <b>923806</b>	58	5000	LUMILUX Cool Daylight	80...89	26	1500	25

OSRAM now offers the new LUMILUX® T8 XXT for lighting systems with extreme relamping demands. These lamps provide maximum reliability and a service life\* of up to 75,000 hours, extending the maintenance cycle even further\*\*. Replacement costs are reduced to a minimum, and the use of resources is cut even more because the service life\* of a LUMILUX® T8 XXT is 4.1 times greater than that of a normal LUMILUX®.

For more information on the system guarantee and the terms and conditions of the guarantee go to [www.osram.com/system-guarantee](http://www.osram.com/system-guarantee).




## LUMILUX® DE LUXE T8, tubular, G13 base

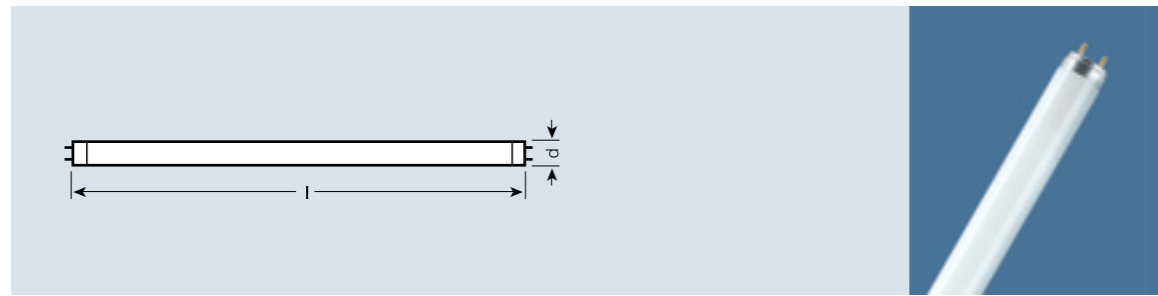

Product reference	Product number	W	lm		R <sub>a</sub>	TUBE d [mm]	l [mm]	
<b>LUMILUX® DE LUXE T8, tubular, G13 base</b>								
L 15 W/930	4050300014395	15	700	LUMILUX DE LUXE Warm White	> 90	26	438	25
L 15 W/954	4050300018249	15	750	LUMILUX DE LUXE Daylight	> 90	26	438	25
L 16 W/930	40503000242361	16	950	LUMILUX DE LUXE Warm White	> 90	26	720	25
L 18 W/930	4050300011264	18	1100	LUMILUX DE LUXE Warm White	> 90	26	590	25
L 18 W/940	4050300011257	18	1200	LUMILUX DE LUXE Cool White	> 90	26	590	25
L 18 W/954	4050300018256	18	1150	LUMILUX DE LUXE Daylight	> 90	26	590	25
L 18 W/965	4008321111371	18	1150	LUMILUX DE LUXE Cool Daylight	> 90	26	590	25
L 30 W/930	4050300014432	30	1950	LUMILUX DE LUXE Warm White	> 90	26	895	25
L 36 W/930	4050300011318	36	2700	LUMILUX DE LUXE Warm White	> 90	26	1200	25
L 36 W/940	4050300011301	36	2900	LUMILUX DE LUXE Cool White	> 90	26	1200	25
L 36 W/954	4050300018263	36	2850	LUMILUX DE LUXE Daylight	> 90	26	1200	25
L 36 W/954-1	4050300024196	36	2600	LUMILUX DE LUXE Daylight	> 90	26	970	25
L 36 W/965	4008321111395	36	2850	LUMILUX DE LUXE Cool Daylight	> 90	26	1200	25
L 58 W/930	4050300011363	58	4350	LUMILUX DE LUXE Warm White	> 90	26	1500	25
L 58 W/940	4050300011356	58	4600	LUMILUX DE LUXE Cool White	> 90	26	1500	25
L 58 W/954	4050300018270	58	4550	LUMILUX DE LUXE Daylight	> 90	26	1500	25
L 58 W/965	4008321090034	58	4550	LUMILUX DE LUXE Cool Daylight	> 90	26	1500	25

LUMILUX® DE LUXE lamps from OSRAM offer excellent color rendering of more than 90 and are extremely efficient. They are ideal for all applications in which color rendering plays an important role and high luminous flux is needed, such as in schools, offices, training rooms and retail outlets.

## COLOR proof T8, tubular, G13 base

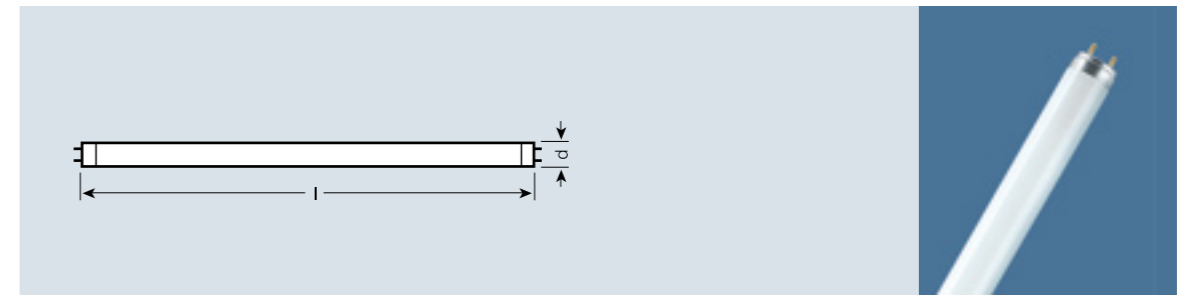

Product reference	Product number	W	lm		R <sub>a</sub>	TUBE d [mm]	l [mm]	
<b>COLOR proof T8, tubular, G13 base</b>								
L 18 W/950	4008321101891	18	960	Daylight	98	26	590	25
L 36 W/950	4008321101914	36	2300	Daylight	98	26	1200	25
L 58 W/950	4008321102133	58	3650	Daylight	98	26	1500	25


### COLOR proof – daylight with the best possible color rendering

COLOR proof is the ideal choice for **precise** color matching and distinguishing between the **finest** nuances. It has a color rendering index of R<sub>a</sub> = 98 at a color temperature of 5300 K.

For museums and art galleries, dental laboratories, graphic workshops, photographic laboratories, and industrial testing and color matching facilities, light color 950 offers optimum color characteristics.

In dentists' practices, for example, crowns can be perfectly matched to the patient's natural tooth color. In reprographic workshops, prints can be checked under optimum daylight conditions.

## BIOLUX® T8, tubular, G13 base

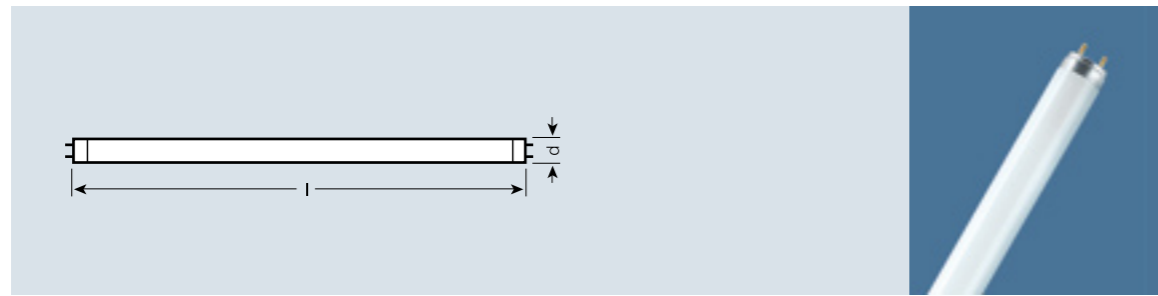


Product reference	Product number	W	lm		Ra			
<b>BIOLUX® T8, tubular, G13 base</b>								
L 18 W/965	4050300270807	18	1000	BIOLUX	> 90	26	590	10
L 30 W/965	4050300302461	30	1600	BIOLUX	> 90	26	895	10
L 36 W/965	4050300270821	36	2300	BIOLUX	> 90	26	1200	10
L 58 W/965	4050300370613	58	3700	BIOLUX	> 90	26	1500	10
For QUICKTRONIC® electronic control gear see Section 9.								

### BIOLUX® – light that gives your animals a feeling of well-being

BIOLUX® fluorescent lamps from OSRAM emit a daylight white light that gives your animals a sense of natural sunlight. Reptiles, tortoises and the like in particular need a daylight spectrum to remain healthy where there is little natural daylight.

Because of its spectral distribution, the light from BIOLUX® lamps is therefore excellent for raising small animals (birds, fish, etc.). For special light colors see page 4.35.

## FLUORA® T8, tubular, G13 base

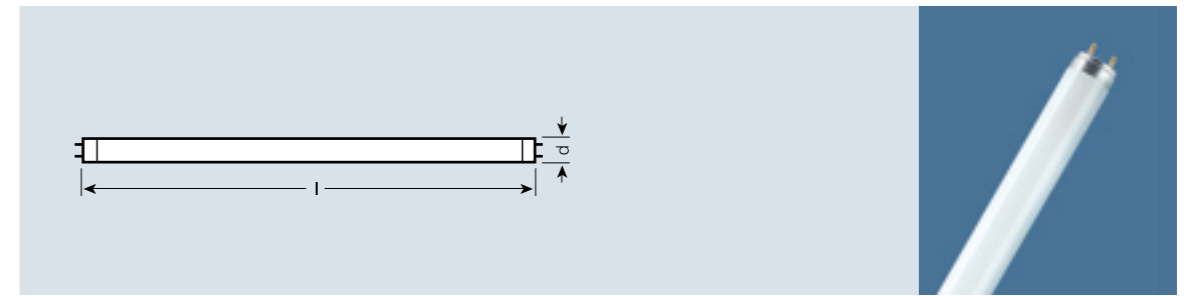


Product reference	Product number	W	lm				
<b>FLUORA® T8, tubular, G13 base</b>							
L 15 W/77	4050300003214	15	400	FLUORA	26	438	10
L 18 W/77	4050300004235	18	550	FLUORA	26	590	10
L 30 W/77	4050300003238	30	1000	FLUORA	26	895	10
L 36 W/77	4050300003184	36	1400	FLUORA	26	1200	10
L 58 W/77	4050300004259	58	2250	FLUORA	26	1500	10
For QUICKTRONIC® electronic control gear see Section 9.							

### FLUORA® – light for healthier plants and for aquariums

The light from FLUORA® fluorescent lamps has an emphasis at the blue and red ends of the spectrum so it is ideal for promoting photo-biological processes in plants. The result is healthier plants.

FLUORA® lamps are used wherever plants do not receive enough natural daylight, for example over feature planting in shopping centers, offices, hotels and the home, and also for florists' shops and greenhouses.

## Colored T8, tubular, G13 base

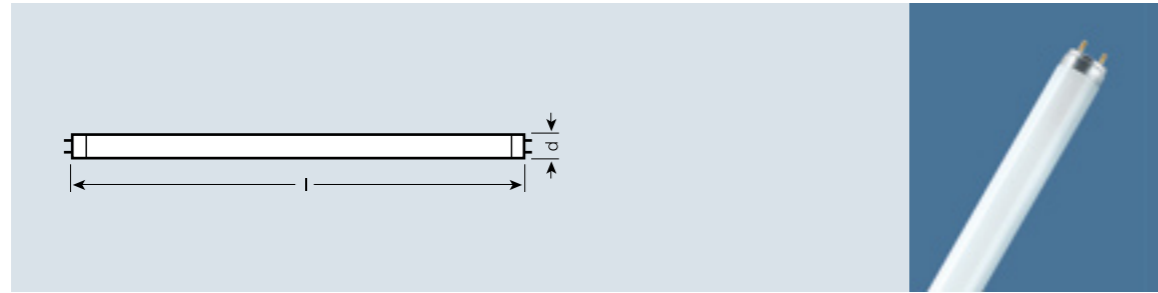


Product reference	Product number	W	lm		TUBE d [mm]	l [mm]	
<b>Colored T8, tubular, G13 base</b>							
L 18 W/60	4050300024219	18	900	Red	26	590	10
L 18 W/62	4008321232700	18	970	Yellow	26	590	12
L 18 W/66	4050300024226	18	1800	Green	26	590	10
L 18 W/67	4050300024233	18	400	Blue	26	590	10
L 30 W/67	4050300366920	30	600	Blue	26	895	10
L 36 W/60	4050300024240	36	2400	Red	26	1200	10
L 36 W/62	4008321232724	36	2300	Yellow	26	1200	12
L 36 W/66	4050300024257	36	4400	Green	26	1200	10
L 36 W/67	4050300024264	36	900	Blue	26	1200	10
L 38 W/62	4008321232984	38	2270	Yellow	26	1047	12
L 58 W/60	4050300024271	58	3800	Red	26	1500	10
L 58 W/62	4008321232748	58	4080	Yellow	26	1500	12
L 58 W/66	4050300024288	58	6700	Green	26	1500	10
L 58 W/67	4050300024295	58	1600	Blue	26	1500	10

For QUICKTRONIC® electronic control gear see Section 9.

For more information on the system guarantee and the terms and conditions of the guarantee go to [www.osram.com/system-guarantee](http://www.osram.com/system-guarantee).

## OSRAM NATURA® T8, tubular, G13 base OSRAM NATURA® SPLIT control T8, tubular, G13 base

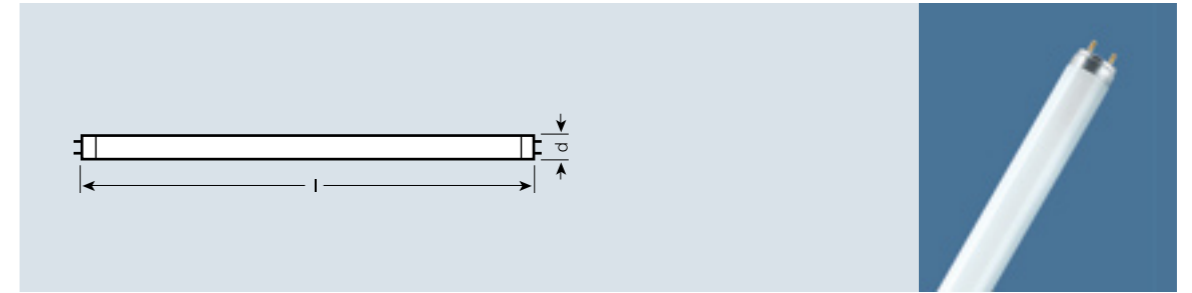

Product reference	Product number	W	lm		TUBE d [mm]	l [mm]	
<b>OSRAM NATURA® T8, tubular, G13 base</b>							
L 15 W/76	4050300018287	15	500	NATURA	26	438	10
L 18 W/76	4050300010519	18	750	NATURA	26	590	10
L 30 W/76	4050300010540	30	1300	NATURA	26	895	10
L 36 W/76	4050300010526	36	1800	NATURA	26	1200	10
L 36 W/76-1	4050300010557	36	1600	NATURA	26	970	10
L 58 W/76	4050300010533	58	2850	NATURA	26	1500	10
<b>OSRAM NATURA® SPLIT control T8, tubular, G13 base</b>							
L 18 W/76 SPS	4008321232762	18	730	NATURA	26	590	12
L 30 W/76 SPS	4008321232786	30	1260	NATURA	26	895	12
L 36 W/76 SPS	4008321232809	36	1740	NATURA	26	1200	12
L 58 W/76 SPS	4008321232847	58	2760	NATURA	26	1500	12

For QUICKTRONIC® electronic control gear see Section 9.

### OSRAM NATURA®/OSRAM NATURA® SPLIT control – good shop light for butchers, bakers and even candlestick makers

According to DIN 10504, the light color of OSRAM NATURA®/OSRAM NATURA® SPLIT control is particularly suitable for the food sector. The specially tailored spectral distribution of the lamp ensures that food is presented in an appetizing light.

Thanks to their specially matched spectrum, fluorescent lamps with light color 76 make meat, sausages, bread, cakes and other foods look fresh and appealing without disguising poor produce.

By using OSRAM NATURA® SPLIT control lamps with their integral protective sleeves in open luminaires the requirements of the International Food Standard are met and the food is fully protected.


OSRAM NATURA® SPLIT control is also suitable for enclosed luminaires.

NEW: Compared with earlier versions of these lamps, the sleeve material is even more heat-resistant and can therefore be used in thermally critical luminaires with high wattages. We recommend replacing lamps with protective sleeves when they reach their average life.

The new version of OSRAM NATURA® SPLIT control T8 is identified by a green marker ring.

For more information on the system guarantee and the terms and conditions of the guarantee go to [www.osram.com/system-guarantee](http://www.osram.com/system-guarantee).

## LUMILUX® SPLIT control T8, tubular, G13 base

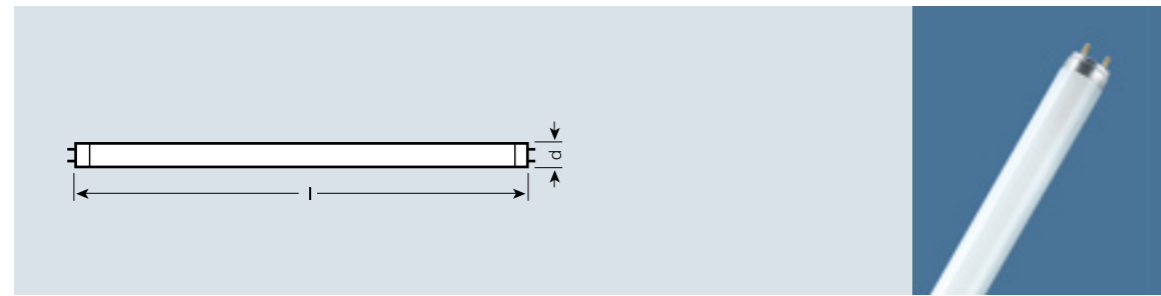

Product reference	Product number	W	lm		Ra			
<b>LUMILUX® SPLIT control T8, tubular, G13 base</b>								
L 18 W/840 SPS	4008321232885	18	1300	Cool White	80...89	26	590	12
L 36 W/840 SPS <sup>1)</sup>	4008321232823	36	3250	Cool White	80...89	26	1200	12
L 58 W/840 SPS <sup>1)</sup>	4008321232922	58	5100	Cool White	80...89	26	1500	12

NEW  
NEW  
NEW

### LUMILUX® SPLIT control – effective control of splinters

It is essential especially in the food industry and in sensitive food production areas that the accidental breakage of lamps does not lead to the widespread scattering of shattered glass. In the unlikely event of breakage, the SPLIT control design ensures that no shattered glass can be dispersed thanks to the plastic sleeve that is attached both to the glass and base. These lamps are highly recommended to companies operating and certified in accordance to the International Food Standard, particularly if open luminaires are in place.


Since 1998 in lieu of the Food Hygiene Directive, the Hazard Analysis and Critical Control Point (HACCP) concept has been implemented into German regulations.

NEW: Compared with earlier versions of these lamps, the sleeve material is even more heat-resistant and can therefore be used in thermally critical luminaires with high wattages. We recommend replacing lamps with protective sleeves when they reach their average life.

The new version of LUMILUX® SPLIT control T8 is identified by a green marker ring. SPLIT control lamps are available immediately also as T5 HE and T5 HO (see p. 4.11).

For more information on the system guarantee and the terms and conditions of the guarantee go to [www.osram.com/system-guarantee](http://www.osram.com/system-guarantee).

## LUMILUX® COLOR control T8, tubular, G13 base

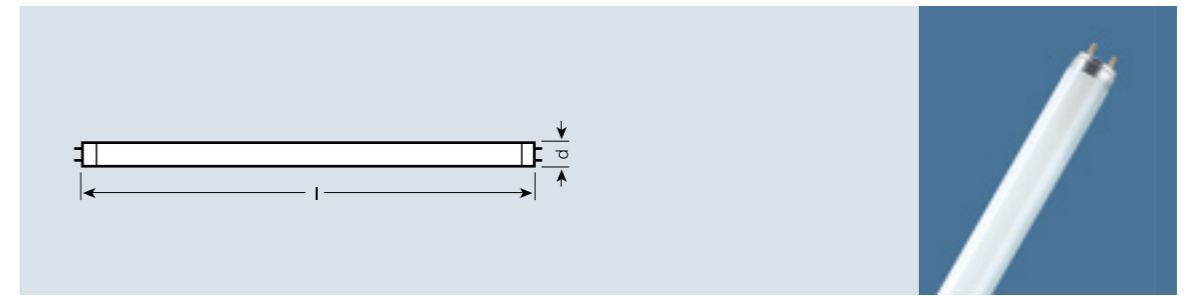


Product reference	Product number	W	lm		Ra			
<b>LUMILUX® COLOR control T8, tubular, G13 base</b>								
L 18 W/940 UVS	4008321050014	18	1150	Cool White	> 90	26	590	12
L 18 W/954 UVS	4008321120229	18	1100	Daylight	> 90	26	590	12
L 36 W/940 UVS	4008321050038	36	2750	Cool White	> 90	26	1200	12
L 36 W/954 UVS	4008321120243	36	2700	Daylight	> 90	26	1200	12
L 58 W/940 UVS	4008321050090	58	4350	Cool White	> 90	26	1500	12
L 58 W/954 UVS	4008321049957	58	4300	Daylight	> 90	26	1500	12

### LUMILUX® COLOR control:

The excellent color rendering of these lamps makes them ideal for lighting systems in museums, exhibitions, art galleries, trade fairs and retail outlets. UV radiation can lead to bleaching, which would be a particular problem in these applications. LUMILUX® COLOR control is therefore enclosed in a plastic sleeve specially developed for OSRAM that reduces UV emissions from the lamp by 99%. This complies with the requirements of EN 12464-1 of course.

## LUMILUX® CHIP control® T8, tubular, G13 base

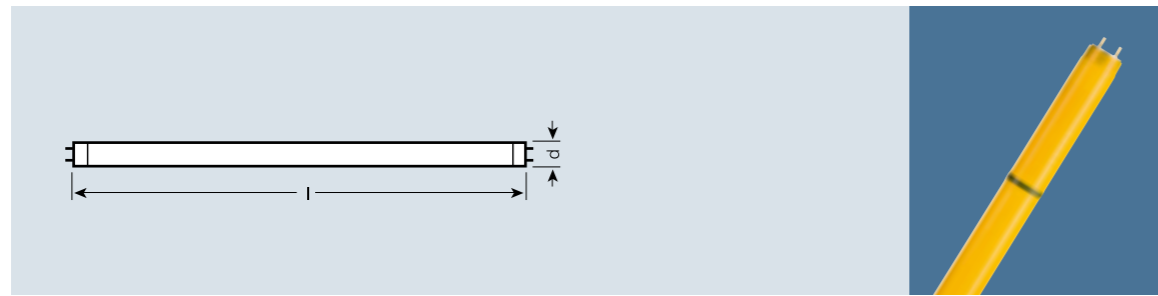

Product reference	Product number	W	lm				
<b>LUMILUX® CHIP control® T8, tubular, G13 base</b>							
L 18 W/62	4008321232700	18	970	Yellow	26	590	12
L 36 W/62	4008321232724	36	2300	Yellow	26	1200	12
L 38 W/62	4008321232984	38	2270	Yellow	26	1047	12
L 58 W/62	4008321232748	58	4080	Yellow	26	1500	12

Approved for use in enclosed luminaires.

LUMILUX® CHIP control®: ideal for semiconductor fabrication plants and areas where UV radiation and light from the blue end of the spectrum must be reduced to the absolute minimum. For example, in print shops during the exposure of printing plates and also for lighting systems in which splinter protection and good color effects are required.


For more information on the system guarantee and the terms and conditions of the guarantee go to [www.osram.com/system-guarantee](http://www.osram.com/system-guarantee).

NEW: Compared with earlier versions of these lamps, the sleeve material is even more heat-resistant and can therefore be used in thermally critical luminaires with high wattages. We recommend replacing lamps with protective sleeves when they reach their average life.

The new version of CHIP control is identified by a green marker ring. CHIP control lamps are available immediately also as T5 HE and T5 HO (see p. 4.12).

NEW  
NEW  
NEW  
NEW


## ENERGY SAVER (Basic) T8, tubular, G13 base

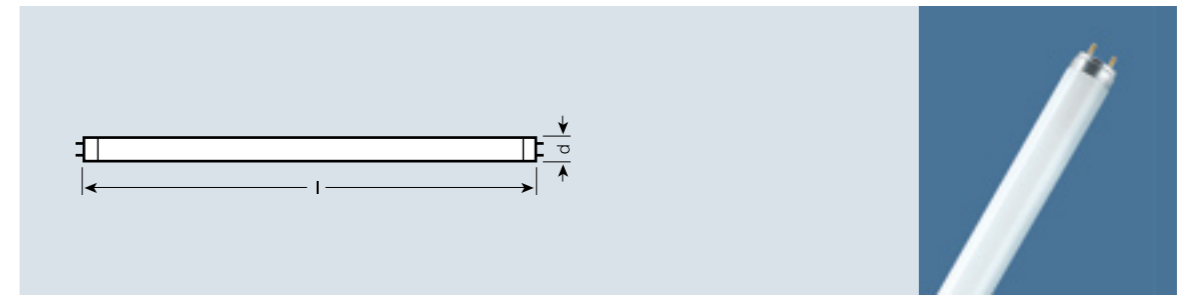

Product reference	Product number	W	lm		Ra			
<b>ENERGY SAVER (Basic) T8, tubular, G13 base</b>								
L 15 W/640	4050300207179	15	850	Cool White	60...69	26	438	25
L 15 W/765	4050300207155	15	740	Cool Daylight	70...79	26	438	25
L 16 W/640	4050300018225	16	1100	Cool White	60...69	26	720	25
L 18 W/640	4050300001647	18	1200	Cool White	60...69	26	590	25
L 18 W/765	4050300224879	18	1050	Cool Daylight	70...79	26	590	25
L 23 W/640	4050300237220	23	1750	Cool White	60...69	26	970	25
L 23 W/765	4050300239422	23	1450	Cool Daylight	70...79	26	970	25
L 30 W/765	4050300211978	30	1900	Cool Daylight	70...79	26	895	25
L 30 W/640	4050300207469	30	2100	Cool White	60...69	26	895	25
L 36 W/640 <sup>1)</sup>	4050300001708	36	2850	Cool White	60...69	26	1200	25
L 36 W/640-1	4050300011394	36	2750	Cool White	60...69	26	970	25
L 36 W/765	4050300224954	36	2500	Cool Daylight	70...79	26	1200	25
L 58 W/640 <sup>1)</sup>	4050300001784	58	4600	Cool White	60...69	26	1500	25
L 58 W/765	4050300225029	58	4000	Cool Daylight	70...79	26	1500	25
L 70 W/640	4008321003973	70	5250	Cool White	60...69	26	1800	25

<sup>1)</sup> Also available in industrial packs ( ... IVP) for bulk orders. Contains 30 lamps


## U-shaped T8, 2G13 base Shortened U-shaped T8, 2G13 base

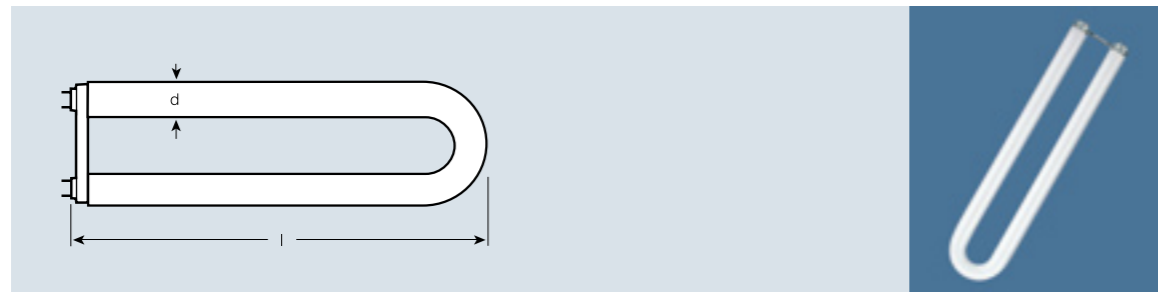

Product reference	Product number	W	lm CCG		Ra	TUBE d [mm]	l [mm]	
<b>U-shaped T8, 2G13 base</b>								
<b>LUMILUX version</b>								
L 18 W/830 U	4008321103765	18	1200	LUMILUX Warm White	80...89	26	310	24
L 36 W/830 U	4008321074119	36	3000	LUMILUX Warm White	80...89	26	607	12
L 58 W/830 U	4008321074232	58	4700	LUMILUX Warm White	80...89	26	765	12
<b>BASIC version</b>								
L 18 W/640 U	4050300530819	18	1050	Cool White	60...69	26	310	24
L 36 W/640 U	4050300530833	36	2600	Cool White	60...69	26	607	12
L 58 W/640 U	4050300530994	58	4100	Cool White	60...69	26	765	12
<b>Shortened U-shaped T8, 2G13 base</b>								
<b>LUMILUX version</b>								
L 36 W/830 UK	4050300530956	36	2800	LUMILUX Warm White	80...89	26	570	12
L 36 W/840 UK	4050300530932	36	2800	LUMILUX Cool White	80...89	26	570	12
L 58 W/840 UK	4050300606668	58	4700	LUMILUX Cool White	80...89	26	570	12
<b>BASIC version</b>								
L 36 W/640 UK	4050300530970	36	2450	Cool White	60...69	26	570	12
L 58 W/640 UK	4008321040299	58	4100	Cool White	60...69	26	570	12

Compact space-saving lighting systems. Street lighting is a typical application.


## T9 C circular, G10Q base

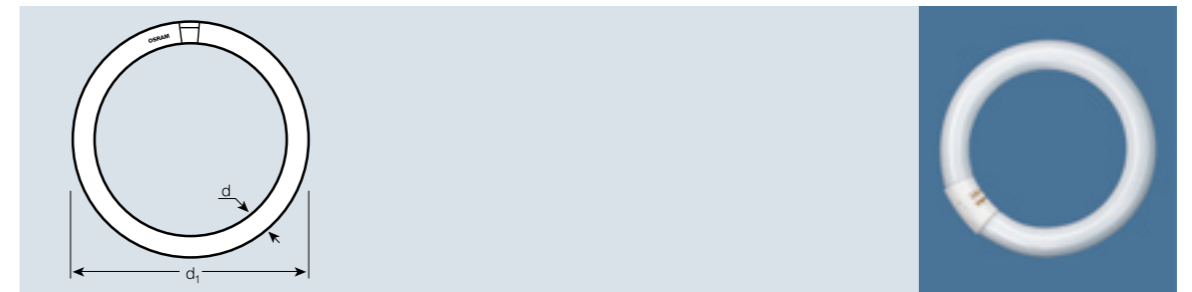

Product reference	Product number	W	lm CCG		Ra	∅ d1 [mm]	TUBE d [mm]	
<b>T9 C circular, G10Q base</b>								
<b>LUMILUX version</b>								
L 22 W/827 C	4050300365992	22	1250	LUMILUX INTERNA	80...89	216	29	12
L 22 W/840 C	4050300365978	22	1250	LUMILUX Cool White	80...89	216	29	12
L 32 W/827 C	4050300014821	32	2100	LUMILUX INTERNA	80...89	305	29	12
L 32 W/840 C	4050300018379	32	2100	LUMILUX Cool White	80...89	305	29	12
L 40 W/827 C	4050300014838	40	2800	LUMILUX INTERNA	80...89	406	29	12
L 40 W/840 C	4050300014845	40	2800	LUMILUX Cool White	80...89	406	29	12
<b>BASIC version</b>								
L 22 W/640 C	4050300207421	22	1100	Cool White	60...69	216	29	12
L 22 W/765 C	4050300207407	22	1000	Cool Daylight	70...79	216	29	12
L 32 W/640 C	4050300209418	32	1900	Cool White	60...69	305	29	12
L 32 W/765 C	4050300209371	32	1600	Cool Daylight	70...79	305	29	12
L 40 W/640 C	4050300207827	40	2450	Cool White	60...69	406	29	12
L 40 W/765 C	4050300207803	40	2200	Cool Daylight	70...79	406	29	12

Because of their shape, these fluorescent lamps provide omni lighting. Ideal for use in round and rectangular luminaires.

## LUMILUX® T2 FM, tubular W4.3 x 8.5d base

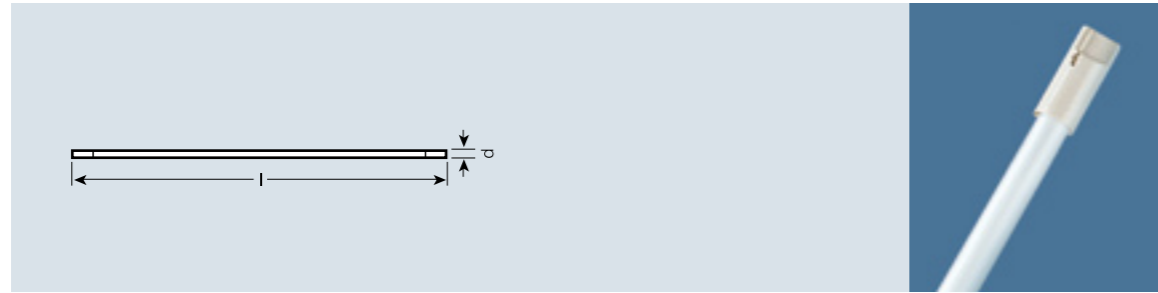


Product reference	Product number	W	Im ECG <sup>1)</sup>		Ra	TUBE d [mm]	l [mm]	
<b>LUMILUX® T2 FM, tubular W4.3 x 8.5d base</b>								
FM 6 W/730	4008321157546	6	330	Warm White	70...79	< 7	218,3	20
FM 6 W/740	4008321157577	6	330	Cool White	70...79	< 7	218,3	20
FM 6 W/760	4008321157607	6	310	Cool Daylight	70...79	< 7	218,3	20
FM 8 W/730	4008321157638	8	540	Warm White	70...79	< 7	319,9	20
FM 8 W/740	4008321157669	8	540	Cool White	70...79	< 7	319,9	20
FM 8 W/760	4008321157690	8	500	Cool Daylight	70...79	< 7	319,9	20
FM 11 W/730	4008321157720	11	750	Warm White	70...79	< 7	421,5	20
FM 11 W/740	4008321157751	11	750	Cool White	70...79	< 7	421,5	20
FM 11 W/760	4008321157782	11	680	Cool Daylight	70...79	< 7	421,5	20
FM 13 W/730	4008321157836	13	930	Warm White	70...79	< 7	523,1	20
FM 13 W/740	4008321157867	13	930	Cool White	70...79	< 7	523,1	20
FM 13 W/760	4008321157898	13	860	Cool Daylight	70...79	< 7	523,1	20

For circuit see page 4.32, Fig. 8

For electronic control gear see Section 9.

## T12, tubular, G13 base

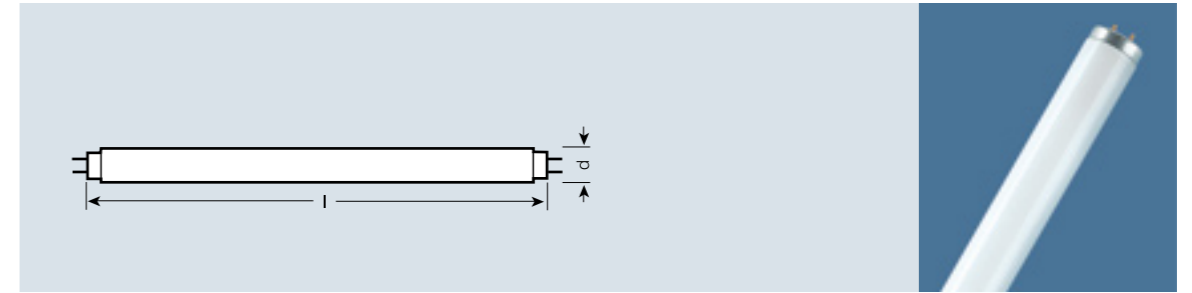

Product reference	Product number	W	Im CCG		Ra	TUBE d [mm]	l [mm]	
<b>S-type T12, tubular, G13 base</b>								
L 20 W/640 S	4050300014685	20	1200	Cool White	60...69	38	590	25
L 20 W/765 S	4050300228815	20	1050	Daylight	70...79	38	590	25
L 40 W/640 S	4050300014708	40	3000	Cool White	60...69	38	1200	25
L 40 W/765 S	4050300228693	40	2500	Daylight	70...79	38	1200	25
L 65 W/640 S	4050300014739	65	4800	Cool White	60...69	38	1500	25
L 65 W/765 S	4050300229027	65	4200	Daylight	70...79	38	1500	25
<b>SA-type T12, tubular, G13 base</b>								
L 20 W/640 SA	4050300018195	20	1150	Cool White	60...69	38	590	25
L 40 W/640 SA	4050300018331	40	2800	Cool White	60...69	38	1200	25
L 65 W/640 SA	4050300018201	65	4400	Cool White	60...69	38	1500	25
L 115 W/640 SA	4050300014487	115	6850	Cool White	60...69	38	1200	25
<b>XL-type T12, tubular, Fa6 base</b>								
L 20 W/640 XL	4050300014630	20	940	Cool White	60...69	38	574	25
L 40 W/640 XL	4050300014654	40	2300	Cool White	60...69	38	1184	25
L 65 W/640 XL	4050300014616	65	4400	Cool White	60...69	38	1484	25

For long-life explosion-proof luminaires in type of protection "increased safety".


### S-type fluorescents:

For operation with starters (ST 111, ST 151, ST 171). Intended for systems with luminaires that are unsuitable, because of their design, for energy-saving 26 mm fluorescent lamps (e.g. certain all-plastic luminaires and outdoor luminaires with minimal thermal insulation or none at all). For Rapid Start (RS) units. Rated heating voltage 3.6 V in accordance with IEC 60081. For circuit see page 4.43, Fig. 4.

### SA-type fluorescents:

For resonance double-choke (RD) circuits at normal and low ambient temperatures. Rated heating voltage 3.6 V in accordance with IEC 60081. For circuit see page 4.43, Fig. 5.

## Starters

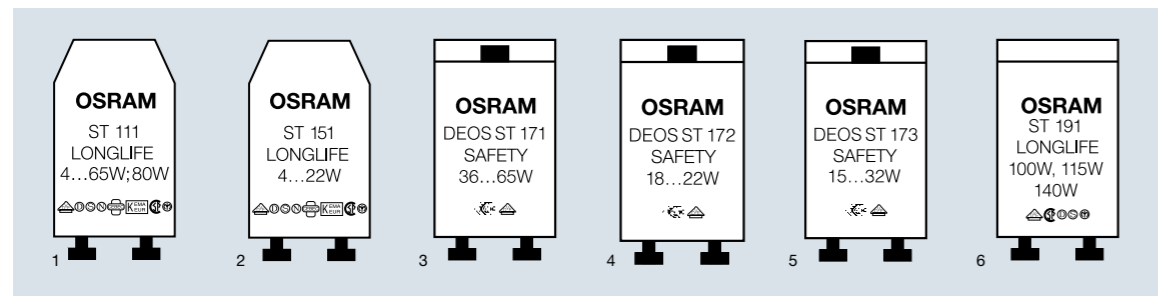

Product reference	Product number	For fluorescent lamps										For OSRAM DULUX® L							
		4	10	15	18	22	30	38	36	58	100	18	36	l (mm)	No.	Icons			
For single operation on 230 V ac																			
ST 111 TRY 25 <sup>5)</sup>	4050300854045	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	40,3	1	25/400
ST 111 GRP <sup>5)</sup>	4050300270166	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	40,3	1	1200
ST 111 HT TRY 25 <sup>3)5)</sup>	4050300854021	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	40,3	1	400
ST 171 TRY 25	4050300854106									X	X	X <sup>1)</sup>	X	X	X	X	40,3	3	25/200
ST 171 GRP	4050300422855									X	X	X <sup>1)</sup>	X	X	X	X	40,3	3	1200
ST 173 TRY 25	4050300854120		X	X	X	X						X	X	X	X	X	40,3	5	25/200
ST 173 GRP	4050300400785		X	X	X	X						X	X	X	X	X	40,3	5	1200
ST 191 TRY 50	4050300839165											X	X	X	X	X	40,3	6	50/800
For series operation on 230 V ac																			
ST 151 TRY 25	4050300854083	X <sup>2)</sup>	X <sup>2)</sup>	X <sup>2)</sup>	X <sup>2)</sup>							X <sup>2)4)</sup>	40,3	2	25/400				
ST 151 GRP	4050300012803	X <sup>2)</sup>	X <sup>2)</sup>	X <sup>2)</sup>	X <sup>2)</sup>							X <sup>2)4)</sup>	40,3	2	1200				
ST 172 TRY 25	4050300854069			X <sup>2)</sup>	X <sup>2)</sup>							X <sup>2)4)</sup>	40,3	4	25/200				
ST 172 GRP	4050300308357			X <sup>2)</sup>	X <sup>2)</sup>							X <sup>2)4)</sup>	40,3	4	1200				

### OSRAM high-quality starters ST 111 LONGLIFE, ST 151 LONGLIFE, ST 171 SAFETY, ST 172 SAFETY, ST 173 SAFETY and ST 191 LONGLIFE.

OSRAM starters ignite every time, reliably and quickly. And they are gentle on lamps. Each starter is subjected to strict manufacturing and quality control tests.

All starters have a self-extinguishing insulated casing made of Makrolon and meet the conditions laid down for protection class II.

They are equipped with a special compensating capacitor (foil winding capacitor), are VDE approved and carry the and marks.

To ensure reliable ignition we recommend that you also replace the starter when you replace the lamp – except in the case of DEOS® SAFETY.

- Switching life from ≥10,000 switching operations to ≥ 60,000 switching operations in inductive mode.
- 20% longer life with fluorescent lamps.

### Features and benefits of DEOS® ST 171 SAFETY, DEOS® ST 172 SAFETY and DEOS® ST 173 SAFETY:

- DEOS® ST 171 SAFETY, DEOS® ST 172 SAFETY and DEOS® ST 173 SAFETY are safety starters.
- DEOS® ST 172 SAFETY is a safety starter for series circuits (tandem circuits).
- DEOS® ST 171 SAFETY, DEOS® ST 172 SAFETY and DEOS® ST 173 SAFETY are designed to operate with conventional control gear (CCG) and low-loss gear (LLG).
- They reliably disconnect burnt-out or faulty lamps under inductive or capacitive operating conditions.
- They are instantly ready for operation when the red button is pressed in (there must be an audible click).
- The automatic cut-out circuit protects the choke and the starter itself.
- Their service life is four times that of conventional starters.
- To ensure reliable ignition and operation the DEOS® ST should be replaced after every four lamp replacements.
- Temperature range for reliable cut-out: -20 °C to +80 °C.

## Fluorescent lamps Which light color for which application?

Area of application	SKY WHITE	Cool Daylight		Daylight	Cool White		White	Warm White		INTERNA®
	880 8000 K	865 6500 K	965 6500 K	954 5400 K	840 4000 K	940 4000 K	835 3500 K	830 3000 K	930 3000 K	827 2700 K
<b>Offices and administrative buildings</b>										
Offices, corridors	•					•		•		
Meeting rooms	•						•	•		•
<b>Industry, trade and commerce</b>										
Electrical industry		•				•				
Textile industry		•	•	•						
Woodworking industry		•	•	•		•				
Graphics industry, laboratories		•	•	•	•					
Color matching			•	•		•				
Warehouses, transport depots						•				
<b>Schools and lecture rooms</b>										
Auditoriums, classrooms, kindergartens	•		•			•		•		•
Libraries, reading rooms						•		•		•
<b>Retail premises</b>										
Food, general		•				•		•		•
Bread and cakes										•
Refrigerated counters and deepfreezers		•								
Dairy goods, fruit, vegetables										•
Fish										•
Meat, sausages			•							
Textiles, leather goods		•	•	•	•	•	•	•	•	•
Furniture, carpets							•	•	•	•
Sporting goods, toys, stationery						•	•	•	•	•
Photo, watches, jewellery		•	•	•	•	•	•	•	•	•
Cosmetics, hairdressers						•	•	•	•	•
Flowers		•	•	•	•	•	•	•	•	•
Department stores, supermarkets	•	•	•		•	•		•	•	•
<b>Public buildings</b>										
Restaurants, inns, hotels						•		•		•
Theatres, concert halls, foyers										•
<b>Exhibition rooms</b>										
Exhibition halls and trade fairs	•					•		•		
Sports and multi-purpose halls	•					•		•		
Art galleries, museums		•		•	•	•			•	
<b>Hospital and surgeries</b>										
Consulting and treatment rooms	•	•	•	•		•				
Hospital wards, waiting rooms	•		•			•			•	
<b>Homes</b>										
Living rooms										•
Kitchens, bathrooms, hobby rooms, cellars		•				•			•	•
Outdoor lighting, streets, paths, pedestrian zones						•		•		
• Recommended    • Optional as required										



## Light colors and color rendering properties of fluorescent lamps to EN 12464-1

Kelvin	Name	R <sub>a</sub> 60...69	R <sub>a</sub> 70...79	R <sub>a</sub> 80...89	R <sub>a</sub> 90...99
2700 K	INTERNA			827	
3000 K	Warm White			830	930
3500 K	White			835	
4000 K	Cool White	640		840	940
5400 K	Daylight				954/950
6500 K	Cool Daylight		765	865	965
8000 K	SKYWHITE			880	

### Type designation.

International color code:

The first digit stands for color rendering

9 = color rendering R<sub>a</sub> 90 to 100

8 = color rendering R<sub>a</sub> 80 to 89

7 = color rendering R<sub>a</sub> 70 to 79

6 = color rendering R<sub>a</sub> 60 to 69

The next digits stand for the light color/

color temperature, e.g. for LUMILUX®

27 = LUMILUX INTERNA® (2700 K)

30 = LUMILUX® Warm White (3000 K)

35 = LUMILUX® White (3500 K)

40 = LUMILUX® Cool White (4000 K)


54 = LUMILUX® Daylight (5400 K)

65 = LUMILUX® Cool Daylight (6500 K)

80 = LUMILUX SKYWHITE® (8000 K)

### “Old” light color codes in the OSRAM range

Old		New	R <sub>a</sub>	K
10	Cool Daylight	765	70...79	6500
11	Cool Daylight	865	80...89	6500
12	Daylight	954	> 90	5400
20	Cool White	640	60...69	4000
21	Cool White	840	80...89	4000
22	Cool White	940	> 90	4000
26	White	835	80...89	3500
31	Warm White	830	80...89	3000
32	Warm White	930	> 90	3000
41	INTERNA	827	80...89	2700

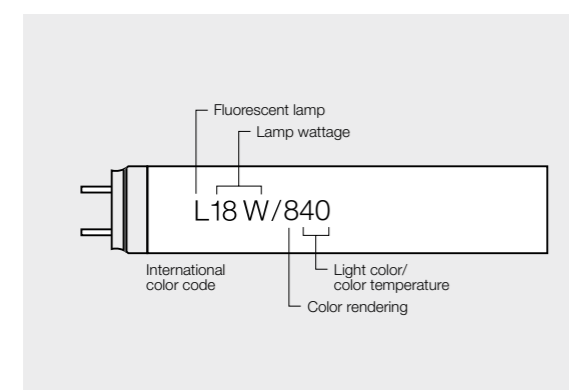

## Light colors

### LUMILUX®

Color 880 LUMILUX SKYWHITE®

Color 865 LUMILUX® Cool Daylight

Color 840 LUMILUX® Cool White

Color 835 LUMILUX® White

Color 830 LUMILUX® Warm White

Color 827 LUMILUX INTERNA®

LUMILUX® colors combine very good color rendering and high luminous efficacy in a single lamp.

Major benefits:

- Reduced power consumption
- Luminous efficacy up to 104 lm/W (T5 HE)
- Excellent color rendering to EN 12464 (R<sub>a</sub> 80 to 89).

For LUMILUX® light colors it is best to use electronic control gear as this is the best way to make economic use of the minimal drop in luminous flux. This also applies to LUMILUX® DE LUXE.

T5 LUMILUX® FH, FQ and FC lamps can only be operated on ECGs.

Color 880 SKYWHITE contains an increased blue component which is particularly energizing. Ideal for offices and public buildings.

### LUMILUX® DE LUXE

Color 965 LUMILUX® DE LUXE Cool Daylight

Color 954 LUMILUX® DE LUXE Daylight

Color 940 LUMILUX® DE LUXE Cool White

Color 930 LUMILUX® DE LUXE Warm White

The LUMILUX® DE LUXE light colors meet the highest demands with regard to natural color rendering (R<sub>a</sub> > 90) and offer good luminous efficacy at the same time.

The daylight color 954 is ideal for print shops, dental surgeries, dental laboratories, slide presentations and clothing stores.

### Special light colors

The red component of 76 NATURA is closely matched to other color components. This results in natural color rendering and makes items such as meat, sausages, delicatessen products, vegetables and flowers appear fresh and natural.

77 FLUORA® has been specially designed for plants and aquariums. Its light has an emphasis at the blue and red ends of the spectrum. It is therefore particularly good at promoting photo-biological processes.

### 965 BIOLUX®

Because of its spectral distribution, the light from OSRAM BIOLUX® lamps is also excellent for raising small animals (birds, fish, reptiles, etc.).

Colors 60 red, 66 green and 67 blue are ideal for creating decorative effects and special moods.

LUMILUX CHIP control (color 62) contains only a very small proportion of UV-A radiation. This light color is therefore suitable for clean-room production facilities, chip fabrication and general UV-free lighting.

For spectral power distributions see pages 4.44 and 4.45.

COLOR control lamps with the codes UVS after the light color have only a very small UV-A content (no UV-B or UV-C).

### COLOR proof

For museums and art galleries, dental laboratories, graphic workshops, photographic laboratories, and industrial testing and color matching facilities, light color 950 offers optimum color characteristics. It has a color rendering index of R<sub>a</sub> = 98 at a color temperature of 5300 K.

## Technical data

### Luminous flux and power consumption

to IEC 60081.

The minimum luminous flux of a single lamp is 92% of the rated luminous flux at 25 °C; the average is 95% of the rated luminous flux.

**Lamp life.** The average and service life-times of LUMILUX® fluorescent lamps are listed in the table below. Operating the lamps above or below their rated power will reduce their service life.

#### Lamp life in accordance with DIN IEC 60081:

(IEC switching cycle)	T8	T8	T8	T5	T5	T5	T5
165 min on, 15 min off	BASIC	LUMILUX	LLX DE LUXE	FH (HE)	FQ (HO)	FC LUMILUX	LLX DE LUXE
Service life on CCG/LLG	5.000	–	–	–	–	–	–
Average life on CCG/LLG	13.000	–	–	–	–	–	–
Service life on hot restart ECG	–	18.000	16.000	16.000	18.000	9.000	16.000
Average life on hot restart ECG	–	20.000	20.000	20.000	24.000	16.000	20.000

Service life is defined as the time when 10% of the lamps have failed.

#### Maximum luminous flux values for T5 fluorescent lamps (16 mm), FH® and FQ® fluorescent lamps

	880	865	840	835	830	827
	SKYWHITE	Cool Daylight	Cool White	White	Warm White	INTERNA
FH 14 W HE	1.250	1.300	1.350	1.350	1.350	1.350
FH 21 W HE	1.900	2.000	2.100	2.100	2.100	2.100
FH 28 W HE	2.700	2.750	2.900	2.900	2.900	2.900
FH 35 W HE	3.450	3.500	3.650	3.650	3.650	3.650
FQ 24 W HO	1.850	1.900	2.000	2.000	2.000	2.000
FQ 39 W HO	3.225	3.325	3.500	3.500	3.500	3.500
FQ 49 W HO	4.600	4.700	4.900	4.900	4.900	4.900
FQ 54 W HO	4.650	4.750	5.000	5.000	5.000	5.000
FQ 80 W HO	6.550	6.650	7.000	7.000	7.000	7.000
FQ 24 W HO CONSTANT	–	1.900	2.000	2.000	2.000	2.000
FQ 39 W HO CONSTANT	–	3.325	3.500	3.500	3.500	3.500
FQ 54 W HO CONSTANT	–	4.750	5.000	5.000	5.000	5.000
FQ 80 W HO CONSTANT	–	6.650	7.000	7.000	7.000	7.000

All values for HE, HO at 35 °C;

for HO CONSTANT the maximum luminous flux is not defined for a particular temperature.

As with all fluorescent lamps, the luminaire efficiency of T5 (16 mm) lamps is calculated at an ambient temperature of 25 °C. In other words, the luminous flux of the lamp measured at 25 °C and the luminous flux of the luminaire measured at 25 °C are used as the basis for calculating the luminaire efficiency. Note that if measurements are taken with gonio-photometers with moving lamps the high-speed air




**Burning position.** Universal for 26 and 38 mm diameters. When T5 HE and T5 HO lamps are installed in the vertical burning positions the stamp must be at the bottom; when T5 FC® lamps are installed in the vertical position the 2GX13 base must be at the bottom. In multi-lamp luminaires, T5 HE or T5 HO lamps must be positioned with the stamps next to one another. The recommended minimum spacing between two T5 lamps is 32 mm for optimum operation (maintenance of the luminous flux/temperature curve).

currents may cause the cool spot to shift from the stamp end of the lamp. Before the illuminance levels from T5 HE, T5 HO and especially FC® lamps are measured in lighting systems, these lamps must be allowed to stabilize for at least 100 hours. If two lamps are to be operated next to one another, make sure that the stamped ends are on the same side so that the cold spot is not heated.

## Technical data

### Temperature dependence

As with fluorescent lamps in general, the rated luminous flux for T5 HE and TE HO fluorescent lamps is specified at 25 °C, and T5 HE and T5 HO achieve their maximum luminous flux at temperatures between 34 and 38 °C. One of the advantages of T5 lamps is therefore an increased luminaire efficiency. T5 FC® circular fluorescent lamps achieve their maximum luminous flux between 25 and 30 °C. The luminous flux of a T5 HO CONSTANT at 25 °C is on average 97% of the maximum luminous flux. 90% of the maximum luminous flux is achieved in a temperature range from +5 °C to +70 °C.

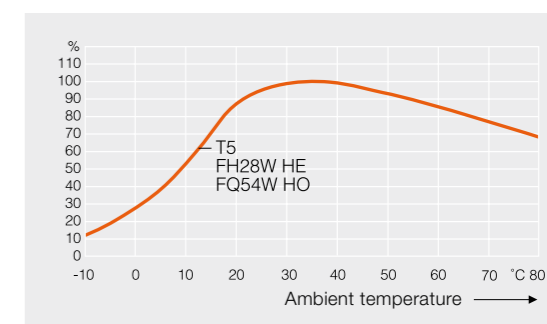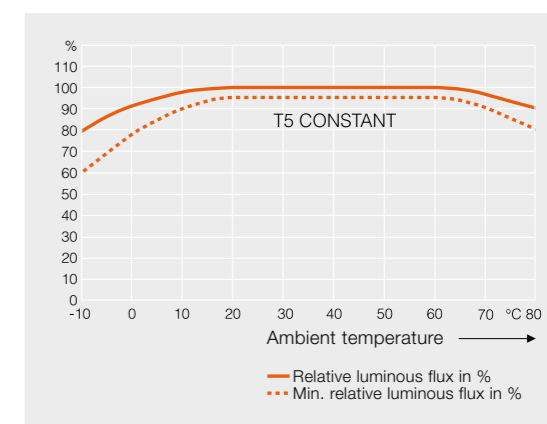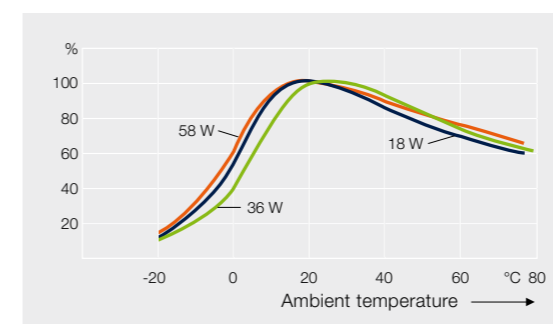

**Control gear.** In order to operate, each lamp needs control gear appropriate to its wattage. The control gear not only starts the lamp but also limits the current in the discharge phase. Please note: fluorescent lamps are guaranteed only if they are operated with approved control gear or with control gear declared to be suitable. Control gear must comply with EN standards. Modern control gear, such as QUICKTRONIC®, enables energy saving fluorescent lamps to be operated with optimum economy and lighting comfort, see Section 9. Control gear for sale in the European Union must carry the ENEC mark (tested to IEC 60081). This safeguards the warranty for the lamps under normal conditions.

**See circuit diagrams** on pages 4.42 and 4.43 and Section 9.

**Power supply.** Generally 230 V AC. Until 2008, the permissible temporary voltage fluctuations for ac voltage is -10% +6%, i.e. 207 to 244 V. From 2009, ±10% is permitted, i.e. 207 to 253 V. Electronic control gear is considerably less affected by fluctuations in the supply voltage than conventional control gear. DC operation for emergency lighting systems in accordance with DIN VDE 0108 is indicated in the specifications for the electronic control gear.

**Accessories.** Control gear and holders are available from electrical suppliers. OSRAM compact fluorescent lamps and fluorescent lamps are cadmium-free.

## Technical data

Fluorescent lamp	Ø	Rated lamp current (CCG operation) uncorrected	Lamp voltage UL after ignition (±10%)	Resistance/impedance Z (on CCG)	Pre-heating current IEC 81	Luminance Color LF 840, 830, 827	PFC capacitor <sup>1)</sup> Power factor ≈ 1 for CCG operation	Series capacitor for CCG Lead-lag circuit <sup>2)</sup>
(Wattage)	(mm)	(A)	(V)	(Ω)	(mA) <sup>4)</sup>	(cd/cm <sup>2</sup> )	(μF)	(μF/Vc)
4	16	0,17	29	170	220	–	2,0	–
6	16	0,16	42	260	220	–	2,0	–
8	16	0,145	56	385	220	–	2,0	–
10	26	0,17	64	375	220	–	2,0	–
13	16	0,165	95	590	220	–	2,0	–
15	26	0,33	55	165	440	1,0	4,5	–
16	26	0,20	90	450	260	0,8	2,5	–
18	26	0,37	57	155	550	1,0	4,5	2,7/480
18/... U	26	0,37	60	165	550	–	–	–
20	38	0,37	57	155	550	–	4,5	2,7/480
20/... XL	38	0,38	57	155	–	–	4,5	–
22 C	29	0,37	62	165	600	–	5,0	3,0/480
30	26	0,365	96	265	550	1,2	4,5	2,9/450
32 C	29	0,425	81	190	675	0,9	5,0	3,4/450
36	26	0,43	103	240	650	1,2	4,5	3,4/450
36/... U	26	0,43	108	250	650	–	–	–
36-1	26	0,556	81	145	730	1,3	6,0	4,3/480
38 <sup>3)</sup>	26	0,43	104	240	650	–	4,5	3,4/450
40	38	0,43	103	240	650	–	4,5	3,4/450
40 C	29	0,415	108	260	630	–	–	–
40/... SA	38	0,43	103	240	650	–	–	–
40/... DS <sup>®</sup>	38	0,43	103	240	650	0,7	–	–
40/... XL	38	0,415	103	240	–	–	4,5	–
40/... K	38	0,88	52					
58	26	0,67	110	165	1000	1,5	7,0	5,3/450
58/... U	26	0,67	115	170	1000	–	–	–
60 C	29	0,750	90	260	630	–	–	–
65	38	0,67	110	165	1000	–	7,0	5,3/450
65/... SA	38	0,67	110	165	1000	–	–	–
65/... DS <sup>®</sup>	38	0,67	110	165	1000	0,8	–	–
65/... XL	38	0,67	110	165	–	–	–	–

1) For parallel compensation in circuit diagrams 1 and 2 see page 4.43  
 2) Lead-lag circuit as per circuit diagram 3 on page 4.43  
 3) With 40 W control gear  
 4) Preheating currents are maximum values for a preheat time of 2 s



## Technical data

Fluorescent lamp	Ø	Rated lamp current (ECG operation) (±10 %) <sup>1)</sup>	Lamp voltage UL after ignition <sup>1)</sup>	System wattage with control gear (W)	Pre-heating current IEC 81 (mA)	Luminance Color LF 840
(Wattage)	(mm)	(A)	(V)	(W)	(mA)	(cd/cm <sup>2</sup> )
14 (FH HE)	16	0,165	86	16,0 <sup>6)</sup>	210	1,7
21 (FH HE)	16	0,165	126	23,5 <sup>6)</sup>	210	1,7
28 (FH HE)	16	0,170	166	30,5 <sup>6)</sup>	210	1,7
35 (FH HE)	16	0,175	205	38,5 <sup>6)</sup>	210	1,7
24 (FQ HO)	16	0,295	77	27,0 <sup>7)</sup>	440	2,5
39 (FQ HO)	16	0,325	118	45,5 <sup>7)</sup>	440	2,8
49 (FQ HO)	16	0,245	191 <sup>4)</sup>	55 <sup>7)</sup>		2,3
54 (FQ HO)	16	0,455	120	61,0 <sup>7)</sup>	720	2,9
80 (FQ HO)	16	0,530	152	85,0 <sup>7)</sup>	765	3,2
24 (FQ HO CONSTANT)	16	0,295	77	27,0 <sup>7)</sup>	440	2,5
39 (FQ HO CONSTANT)	16	0,325	118	45,5 <sup>7)</sup>	440	2,8
54 (FQ HO CONSTANT)	16	0,455	120	61,0 <sup>7)</sup>	720	2,9
80 (FQ HO CONSTANT)	16	0,530	152	85,0 <sup>7)</sup>	765	3,2
22 (FC)	16	0,30	70	24,5 <sup>8)</sup>	440	1,7
40 (FC)	16	0,32	126	46,5 <sup>8)</sup>	440	2,1
55 (FC)	16	0,55	101	62,0 <sup>8)</sup>	765	2,6
6 (FM)	7	0,10	51	7,5 <sup>2)</sup>	120 <sup>5)</sup>	2,5
8 (FM)	7	0,10	79	11,0 <sup>2)</sup>	120 <sup>5)</sup>	2,5
11 (FM)	7	0,10	110	13,0 <sup>3)</sup>	120 <sup>5)</sup>	2,5
13 (FM)	7	0,10	136	16,0 <sup>3)</sup>	120 <sup>5)</sup>	2,5

1) Values at 25 °C on the reference control gear  
 2) For system wattage with QT-ECO FM 1x6-8/220-240, see Section 9  
 3) For system wattage with QT-ECO FM 1x11-13/220-240, see Section 9  
 4) Values for 35 °C; current is approx. 10 mA lower for 25 °C

5) With reservation  
 6) System wattage on QT-FH  
 7) System wattage on QT-FQ  
 8) System wattage on QT-M or QT-FC

## Dimensions for tubular fluorescent lamps with tolerances

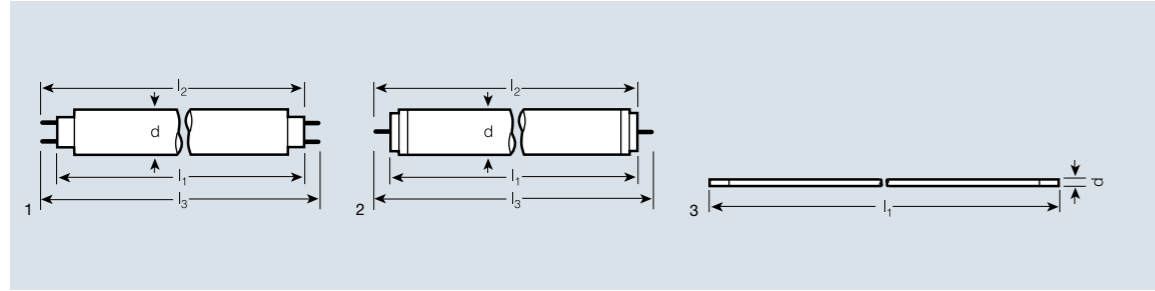

### Tubular fluorescent lamps


7, 16, 26 and 38 mm Ø, G5 base, G13 base, W4,3 x 8,5d base

W		l1 [mm]	l2 [mm]	l3 [mm]	IEC d [mm]	No.
6 (FM)	W4,3x8,5d	218,3 ±1,0	–	–	max. 7	3
8 (FM)	W4,3x8,5d	319,9 ±1,0	–	–	max. 7	3
11 (FM)	W4,3x8,5d	421,5 ±1,0	–	–	max. 7	3
13 (FM)	W4,3x8,5d	523,1 ±1,0	–	–	max. 7	3
4	G5/11x15	135,7	141,7 ±1,2	150,0	max. 16	1
6	G5/11x15	211,9	217,9 ±1,2	226,2	max. 16	1
8	G5/11x15	288,1	294,1 ±1,2	302,4	max. 16	1
13	G5/11x15	516,9	522,8 ±1,2	531,1	max. 16	1
14 (FH HE)	G5/11x15	549,0	554,9 ±1,2	563,2	max. 16	1
21 (FH HE)	G5/11x15	849,0	854,9 ±1,2	863,2	max. 16	1
24 (FQ HO)	G5/11x15	549,0	554,9 ±1,2	563,2	max. 16	1
28 (FH HE)	G5/11x15	1149,0	1154,9 ±1,2	1163,2	max. 16	1
35 (FH HE)	G5/11x15	1449,0	1454,9 ±1,2	1463,2	max. 16	1
39 (FQ HO)	G5/11x15	849,0	854,9 ±1,2	863,2	max. 16	1
49 (FQ HO)	G5/11x15	1449,0	1454,9 ±1,2	1463,2	max. 16	1
54 (FQ HO)	G5/11x15	1149,0	1154,9 ±1,2	1163,2	max. 16	1
80 (FQ HO)	G5/11x15	1449,0	1454,9 ±1,2	1463,2	max. 16	1
10	G13	470,0	475,9 ±1,2	484,2	max. 28	1
15	G13	437,4	443,3 ±1,2	451,6	max. 28	1
16	G13	720,0	725,9 ±1,2	734,2	max. 28	1
18	G13	589,8	595,7 ±1,2	604,0	max. 28	1
23	G13	970,0	975,9 ±1,2	984,2	max. 28	1
30	G13	894,6	900,5 ±1,2	908,8	max. 28	1
36	G13	1199,4	1205,3 ±1,2	1213,6	max. 28	1
36-1	G13	970,0	975,9 ±1,2	984,2	max. 28	1
38	G13	1047,0	1052,8 ±1,2	1061,2	max. 28	1
58	G13	1500,0	1505,9 ±1,2	1514,2	max. 28	1
20	G13	589,8	595,7 ±1,2	604,0	max. 40,5	1
40	G13	1199,4	1205,3 ±1,2	1213,6	max. 40,5	1
40 K	G13	589,8	595,7 ±1,2	604,0	max. 40,5	1
65	G13	1500,0	1505,9 ±1,2	1514,2	max. 40,5	1
80	G13	1500,0	1505,9 ±1,2	1514,2	max. 40,5	1
100	G13	1763,8	1769,7 ±1,2	1778,0	max. 40,5	1

### Fluorescent lamps for starterless operation, 38 mm tube diameter X lamps. Fa6 base

W		l1 [mm]	l2 [mm]	l3 [mm]	IEC d [mm]	No.
20/... XL	Fa6	574,0	590,8 ±1,2	611,0	max. 40,5	2
40/... XL	Fa6	1183,5	1200,3 ±1,2	1220,5	max. 40,5	2
65/... XL	Fa6	1484	1500,9 ±1,2	1521,1	max. 40,5	2

## Dimensions for circular and U-shaped fluorescent lamps with tolerances

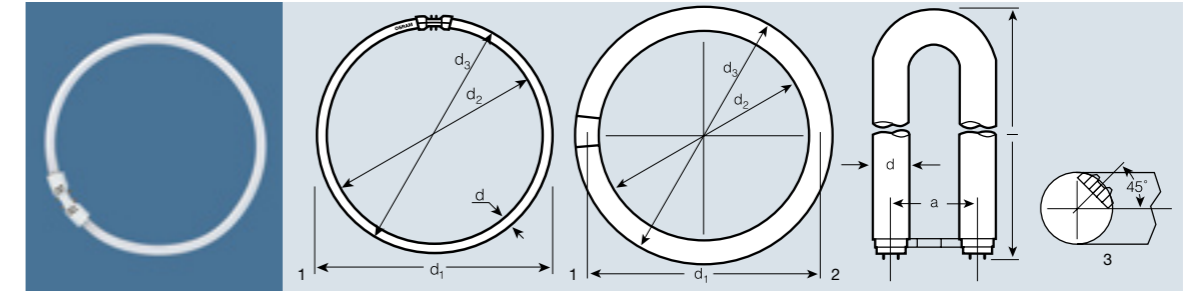

### Circular T5 FC® fluorescent lamps with 16 mm tube diameter

2GX13 base

W		d1 max. [mm]	d2 max. [mm]	d3 max. [mm]	TUBE d [mm]	No.
22	2GX13	192 ±5	225 ±5	16,0	1	
40	2GX13	266 ±6	299 ±6	16,0	1	
55	2GX13	266 ±6	299 ±6	16,0	1	



### Ring-shaped fluorescent lamps

G10q base


W		l [mm]	a [mm]	d [mm]	No.	
22	G10q	157,2	155,6	215,9	29 ±2	2
32	G10q	246,1	246,1	304,8	29 ±2	2
40	G10q	347,7	347,7	406,4	29 ±2	2
60	G10q	347,7	347,7	406,4	29 ±2	2



### U-shaped fluorescent lamps

2G13 base

W		l [mm]	a [mm]	d [mm]	No.
18	2G13-92	306 –4	92,0 ±2	26 –1	3
36	2G13-92	603 –6	92,0 ±2	26 –1	3
58	2G13-92	759 –9	92,0 ±2	26 –1	3




### Shortened U-shaped fluorescent lamps

2G13 base


W		l [mm]	a [mm]	d [mm]	No.
36	2G13-92	566 –6	92,0 ±2	26 –1	3
58	2G13-92	566 –6	92,0 ±2	26 –1	3

## Circuit diagrams for fluorescent lamps for HF operation (see also ECG section)




Grounding as per IEC 60598

Fig. 6  
QUICKTRONIC® PROFESSIONAL for connecting one LUMILUX® 18 W, 36 W or 58 W fluorescent lamp




Grounding as per IEC 60598

Fig. 7  
QUICKTRONIC® PROFESSIONAL for connecting two LUMILUX® 18 W, 36 W or 58 W fluorescent lamps




Grounding as per IEC 60598

Fig. 8  
QUICKTRONIC® FM for connecting one FM® 6 W, 8 W, 11 W or 13 W lamp



Grounding as per IEC 60598

Fig. 8 a  
QUICKTRONIC® QT-ECO FM for connecting one 6 W, 8 W, 11 W or 16 W FM® lamp




Cables 3 and 4 should be kept as short as possible

Fig. 9  
QUICKTRONIC® for connecting one 16 mm dia. L 6 W to L 13 W




Grounding as per IEC 60598

Fig. 9 a  
QUICKTRONIC® QT-M for connecting one LUMILUX 18 W or 36 W fluorescent lamp




Grounding as per IEC 60598

Fig. 10  
QUICKTRONIC® FH or FQ for connecting one FH® 14 W, 28 W, 35 W lamp or one FQ® 24 W, 39 W, 54 W or 80 W lamp




Grounding as per IEC 60598

Fig. 11  
QUICKTRONIC® FQ for connecting two FM® 24 W, 39 W, 49 W or 54 W lamps




Grounding as per IEC 60598

Fig. 12  
QUICKTRONIC® INTELLIGENT for connecting one FH® 14 W, 21 W, 28 W, 35 W lamp or one FQ® 24 W, 39 W, 49 W, 54 W or 80 W lamp



Grounding as per IEC 60598

Fig. 13  
QUICKTRONIC® INTELLIGENT for connecting two FH® 14 W, 21 W, 28 W, 35 W lamps or two FQ® 24 W, 39 W, 49 W or 54 W lamps



Grounding as per IEC 60598

Fig. 14  
QUICKTRONIC® for connecting two 80 W FQ® lamps

## Circuit diagrams for fluorescent lamps Bases

### CIRCUIT DIAGRAMS, STARTER OPERATION

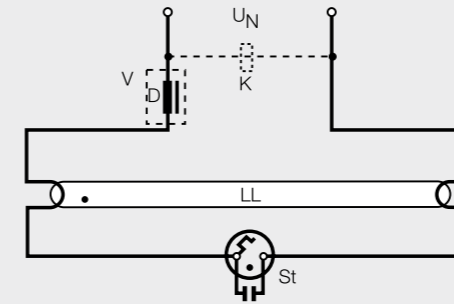


Fig. 1  
Single lamp

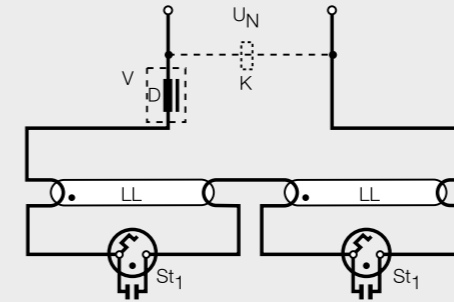


Fig. 2  
Series connection for two lamps 4W, 6W, 8W, 15W, 18W, 20W/S and 22W to 220V ac only with starter ST 151 + ST 172 (see page 4.32 f.)

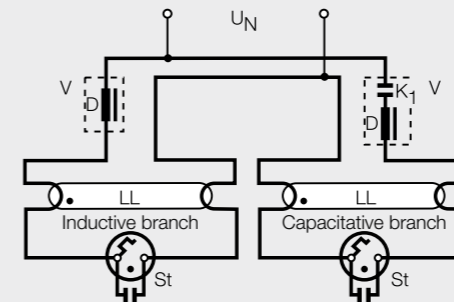


Fig. 3  
Lead-lag circuit

### STARTERLESS OPERATION

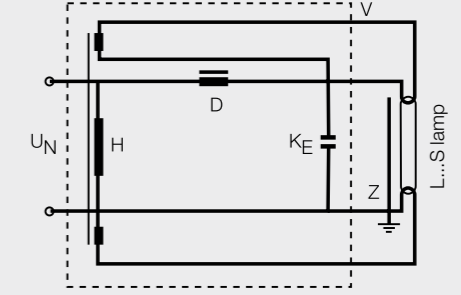


Fig. 4  
Quick-start circuit, inductive


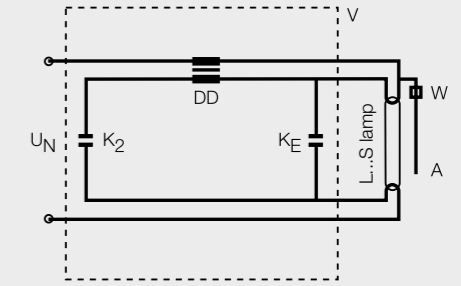



Fig. 5  
Semi-resonant circuit

- |   |  |
|---|--|
| A = External starting strip                         | LL = Fluorescent lamp                          |
| D = Choke   | St = Starter                                   |
| DD = Double choke                                   | St <sub>1</sub> = Starter <sup>1)</sup>        |
| H = Heating transformer                             | U <sub>N</sub> = Supply voltage                |
| K = Compensation capacitor (if required)            | V = Control gear                               |
| K <sub>1</sub> = Series capacitor                   | W = High ohmic resistor (built into lamp base) |
| K <sub>2</sub> = Capacitor                          | Z = Capacitor starting aid                     |
| K <sub>E</sub> = Radio interference capacitor 10 nF |  |
- 1) Prolonged ignition times, especially at low voltage, can be shortened by rotating one of the starters through 180°


### BASES IEC/EN 60061-1




Fa6  
Sheet 7004-55




G13  
Sheet 7004-51




2G13  
Sheet 7004-33




W 4,3 x 8,5d  
Sheet 7004-115



G5  
Sheet 7004-52




G10q  
Sheet 7004-54




2GX13  
Sheet 7004-125

## Spectral power distribution of fluorescent lamps (white light)

Visible range from 380 to 780 nm, relative spectral emission per 10 nm.

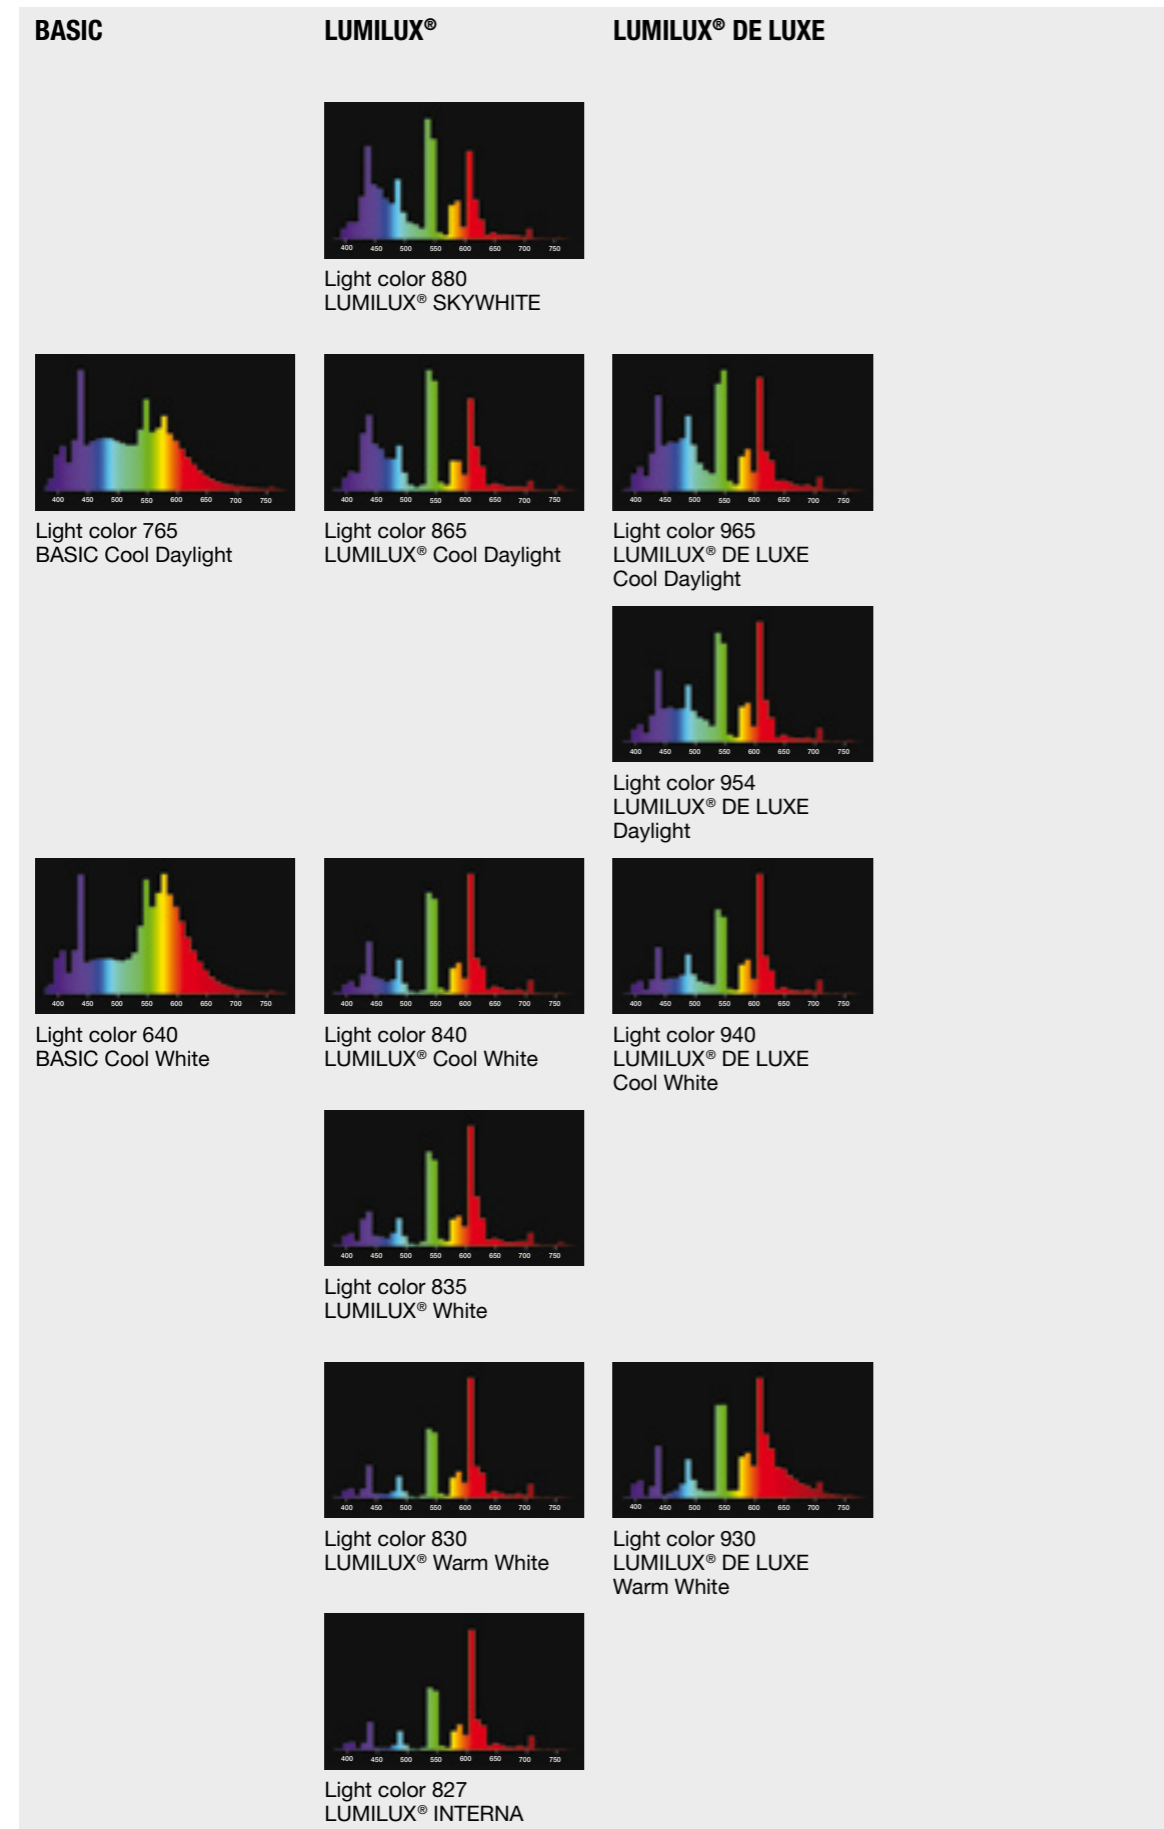

## Spectral power distribution of fluorescent lamps (COLOR proof)



## Spectral power distribution of fluorescent lamps (other colors)

